

Blacklight BL368 Linear T12

F20W T12 BL368 24
0000361



Product features

- Blacklight BL368 Linear T12



PRODUCT OVERVIEW

| | |
|----------------------------|----------------------|
| Product name | F20W T12 BL368 24 |
| Technology | Special applications |
| Lamp shape | Tubular shape |
| Type | T12 |
| Cap/Base | G13 |
| Lamp finish | Frosted/Coated |
| Fixture rating | Enclosed |
| General application | SPG |
| ETIM Class | EC002962 |
| E-number FI | 4940433 |
| Light colour | BL368 Blacklight |
| Wattage (W) | 20.00 |
| Dimmable | No |
| Dimming method | N/A |
| Average life (Nominal) (h) | 10000 |
| Product EAN number | 5410288003610 |

DATA TABLE

General data

| | |
|----------------------------------|----------------------|
| Product name | F20W T12 BL368 24 |
| Technology | Special applications |
| Lamp shape | Tubular shape |
| Type | T12 |
| Cap/Base | G13 |
| Lamp finish | Frosted/Coated |
| Fixture rating | Enclosed |
| General application | SPG |
| Operating temperature range (°C) | -20°C...+40°C |
| ETIM Class | EC002962 |
| E-number FI | 4940433 |

Optical data

| | |
|--|----|
| Ambient temperature for maximum luminous flux (°C) | 25 |
|--|----|

Blacklight BL368 Linear T12

F20W T12 BL368 24

0000361

| | |
|-------------------------|------------------|
| Light colour | BL368 Blacklight |
| Adjustable chromaticity | N |

Electrical data

| | |
|--|-------|
| Wattage (W) | 20.00 |
| Current (A) | 0.37 |
| Primary Supply/Product voltage - min (V) | 230 |
| Primary Supply/Product voltage - max (V) | 240 |
| Control gear required | Yes |
| Dimmable | No |
| Dimming method | N/A |

Lifetime data

| | |
|----------------------------|-------|
| Average life (Nominal) (h) | 10000 |
|----------------------------|-------|

Physical data

| | |
|-------------------------------------|-------------|
| Nominal Product Length (mm) | 600.0 |
| Nominal Product Diameter (mm) | 38 |
| Max. Length base to base (mm) - A | 589.8 |
| Length base to pin Min-Max (mm) - B | 594.5-596.9 |
| Max. Lamp Length (mm) - C/L | 604.0 |
| Max. Lamp Diameter (mm) - D | 40.5 |
| Weight (kg) | 0.133 |

Packaging


| | |
|---------------------------------------|----------------|
| Single packaging type | Carton |
| Product EAN number | 5410288003610 |
| Packaging single length / height (cm) | 60.3 |
| Packaging single width (cm) | 4.3 |
| Packaging single depth (cm) | 4.1 |
| DUN14 (outer) | 15410288003617 |
| Units per outer package | 25 |
| Packaging outer length / height (cm) | 63.0 |
| Packaging outer width (cm) | 22.0 |
| Packaging outer depth (cm) | 21.0 |

Safety data

| | |
|--|--------------------------------|
| Lamp mercury content (mg) | 9.00 |
| Optimal operating condition (°C) | -20-40 |
| Breakage cleaning instructions | Applicable |
| Recommendation for disposal at end of life | Applicable |
| Special purpose lamp | Yes |
| Intended purpose | Flykilling - Insect attraction |
| Suitable for household illumination | No |
| Safety message | Not suitable for household |

Blacklight BL368 Linear T12 F20W T12 BL368 24 0000361

PHOTOMETRY

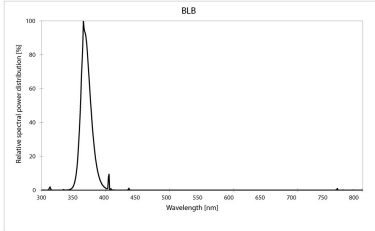

TECHNICAL DRAWINGS

