

## INSAVER SLIM 225


*Insaver Slim 225 IP44 4100lm 840*

0030309

### Product features



- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 33W; 4100lm; 124lm/W; 4000K; UGR <22 with shallow product depth 65mm. Meets TP(a) requirements.

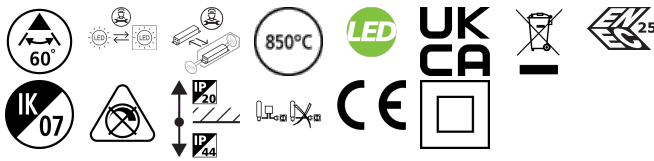



## PRODUCT OVERVIEW

|                                 |                                  |
|---------------------------------|----------------------------------|
| Product name                    | Insaver Slim 225 IP44 4100lm 840 |
| Technology                      | LED                              |
| Cap/Base                        | N/A                              |
| Housing                         | Aluminium                        |
| Mount                           | Ceiling recessed mounting        |
| General application             | Hospitality, Office, Retail      |
| ETIM Class                      | EC001744                         |
| E-number FI                     | 4276923                          |
| Warranty                        | 5 years                          |
| Fixture luminous flux (lm)      | 4100                             |
| Luminaire efficacy (lm/W)       | 124                              |
| Colour temperature (K)          | 4000                             |
| Light colour                    | Neutral White                    |
| CRI (Ra)                        | 80                               |
| Colour Variation Initial (SDCM) | SDCM3                            |
| Beam Angle (°)                  | 60                               |
| Beam Angle (°)                  | NA                               |
| Glare control                   | < 22                             |
| Photobiological Risk Group      | RG1                              |
| Total power consumption (W)     | 33                               |
| Electrical protection           | Class II                         |
| Control gear type               | LED driver constant current      |
| Dimmable                        | No                               |
| Dimming method                  | N/A                              |
| LED Flickering Rate             | Ultra low (5% or less)           |
| Housing colour                  | RAL 9003 - Signal white          |
| IP rating                       | IP44/20                          |
| IK rating                       | IK07                             |
| Product EAN number              | 5410288303093                    |

## PHOTOMETRY

## INSAVER SLIM 225

*Insaver Slim 225 IP44 4100lm 840*  
0030309



## TECHNICAL DRAWINGS

