


RANA LED R 625 HO 4K LOUV+PRI DALI W GEN2

Item No: 0052463

SYLVANIA


PRO

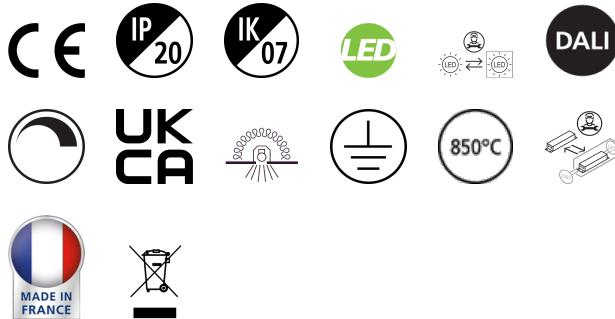



Ceiling Recessed LED Linear luminaire (lay-in), with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 620x620x60mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 570x285mm, DALI Dimmable (Switch-DIM/Push-DIM enabled), Low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 4500lm, 40W, 113lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m², Lumen Maintenance: L90B10 at 50,000 hours, Glow Wire Test 850°C, Quick and easy electrical connection with direct access to push-connectors on top, 2 x metallic safety cables (1.5m) included, the luminaire can be covered with building insulation of Glass Wool type.

Technical Assets

Dimensions (mm)

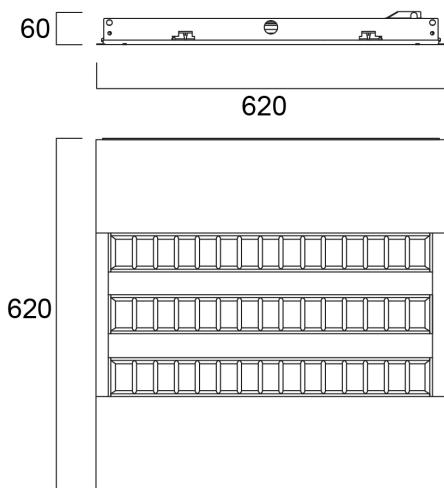

Photometrics



RANA LED R 625 HO 4K LOUV+PRI DALI W GEN2

Item No: 0052463

SYLVANIA

General data

| | |
|---|---|
| Product name | RANA LED R 625 HO 4K LOUV+PRI DALI W GEN2 |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling recessed mounting |
| General application | Education, Hospitality, Office, Retail |
| Performance ambient temperature Tq (°C) | 25 |
| ETIM Class | EC002892 |
| Warranty | 5 years |

Optical data

| | |
|-----------------------------------|---------------|
| Useful luminous flux (Φuse) | 4500 |
| Fixture luminous flux (Im) | 4500 |
| Luminous flux (Im) | 4500 |
| Luminaire efficacy (lm/W) | 113 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Glare control | < 19 |
| Photobiological Risk Group | RG0 |

Electrical data

| | |
|--|--------------------------------|
| Total power consumption (W) | 40 |
| Primary Supply/Product voltage - min (V) | 220 |
| Primary Supply/Product voltage - max (V) | 240 |
| Lamp power factor | 0.98 |
| Electrical protection | Class I |
| Control gear required | No |
| Control gear type | Electronic ballast |
| Dimmable | Yes |
| Dimming method | DALI, Switch-dim (mains-rated) |
| Minimum dimming level (%) | 1 |
| Drive current (mA) | 275 |
| Inrush Current (A) | 29 |
| Inrush Duration (μs) | 180 |
| Energy Efficiency Class (A->G) of contained light source | C |
| Nominal Frequency (Hz) | 50/60Hz |
| Max. products per 10A C Breaker | 21 |
| Max. products per 13A C Breaker | 28 |
| Max. products per 16A C Breaker | 36 |
| Max. products per 20A C Breaker | 45 |
| Max. products per 10A B Breaker | 13 |
| Max. products per 13A B Breaker | 17 |
| Max. products per 16A B Breaker | 22 |
| Max. products per 20A B Breaker | 27 |
| Connectable conductor cross section - Min (mm ²) | 2.5 |
| Connectable conductor cross section - Max (mm ²) | 2.5 |

RANA LED R 625 HO 4K LOUV+PRI DALI W GEN2

Item No: 0052463

SYLVANIA

Lifetime data

| | |
|------------------|-------|
| Lifespan L70 B50 | 50000 |
| Lifespan L70 B10 | 50000 |
| Lifespan L80 B50 | 50000 |
| Lifespan L80 B10 | 50000 |
| Lifespan L90 B50 | 50000 |
| Lifespan L90 B10 | 50000 |

Packaging

| | |
|---------------------------------------|----------------|
| Product EAN number | 5410288524634 |
| Packaging single length / height (cm) | 67.0 |
| Packaging single width (cm) | 6.5 |
| Packaging single depth (cm) | 64.5 |
| DUN14 (inner) | 05410288524634 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 67.0 |
| Packaging outer width (cm) | 6.5 |
| Packaging outer depth (cm) | 64.5 |

Physical data

| | |
|-----------------------------|------------------|
| Housing colour | White |
| IP rating | IP20 |
| IK rating | IK07 |
| Diffuser finish | Prismatic |
| Diffuser material | PC Polycarbonate |
| Nominal Product Length (mm) | 620 |
| Nominal Product Width (mm) | 620 |
| Nominal Product Height (mm) | 60 |
| Weight (kg) | 4.8 |
| Recessed Depth (mm) | 120 |

Safety data

| | |
|---------------------|-----|
| Glow Wire Test (°C) | 850 |
|---------------------|-----|