

Start Waterproof LED G3 fixed output

START Waterproof Single 1200 IP65 2800lm 865
0067963



Product features

- Start Waterproof, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing, Polycarbonate diffuser, 2750 lm, 22 W, 125 lm/W, 6500 K, drive current 350 mA, non dimmable, CRI80, IP65, IK08, Class I, nominal average lifetime (h): 50000, 1278 mm x 84 mm x 75 mm, energy class: A++ A+ A, D-mark




PRODUCT OVERVIEW

Product name	START Waterproof Single 1200 IP65 2800lm 865
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4309081
Warranty	5 years
Useful luminous flux (Fuse)	2750
Fixture luminous flux (lm)	2750
Luminaire efficacy (lm/W)	125
Correlated colour temperature (k)	6500
Light colour	Daylight
CRI (Ra)	80
Glare control	< 26
Photobiological Risk Group	RG1
Total power consumption (W)	22
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288679631

PHOTOMETRY

Start Waterproof LED G3 fixed output

START Waterproof Single 1200 IP65 2800lm 865
0067963

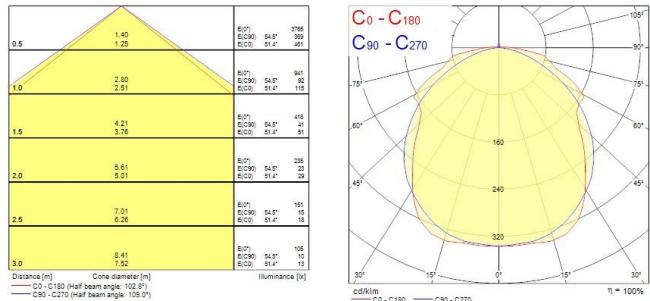

TECHNICAL DRAWINGS

