


CONCORD BEACON 3000K MEDIUM DALI BLACK 2062536

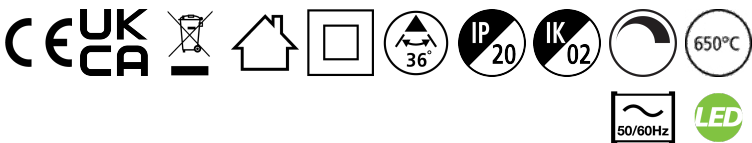

Features

• Simple and slick integral design with no driver box and without any visible screws
New technology utilization for improved performance
Invisible in-track adaptor for an impressive architectural look
Extremely precise light beams due to the high-quality lenses
#80mm die-cast aluminium body, Fix beam angle: 36° , Textured black finishing colour
Light color temperature: 3000K, warm light
System power: 18W, Fixture lumen output: 1625lm, efficacy: 90lm/W, Ra97 typical, LED chromacity: 2 step MacAdam ellipse LED source (SDCM2), IR/UV free light source without heat radiation
Operating voltage 220-240V / 50-60Hz, electronic driver, DALI dimmable
Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet.
Compatible with OneTrack
Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only
Horizontal rotation: 355°, vertical tilt: 90°
Nominal product dimensions: D.80mmx200mm
5 years warranty. Suitable for track mounting


Product Overview

| | |
|----------------------------|--|
| Product name | CONCORD BEACON 3000K MEDIUM DALI BLACK |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Track mounting |
| Fixture rating | Enclosed |
| General application | Museums & Galleries, Retail, Hospitality |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 1625 |
| Luminaire efficacy (lm/W) | 90 |

CONCORD BEACON 3000K MEDIUM DALI BLACK
2062536

| | |
|-----------------------------------|-----------------------------|
| LOR (%) | 100 |
| Correlated colour temperature (k) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 97 |
| Colour Variation Initial (SDCM) | 2 |
| Beam Angle (°) | 36 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 18 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Minimum dimming level (%) | 1 |
| Housing colour | RAL 9005 - Jet black |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768625369 |
| Warranty | 5 years |
| Dimming method | DALI |
| Useful luminous flux (#use) | 1600 |

Photometry

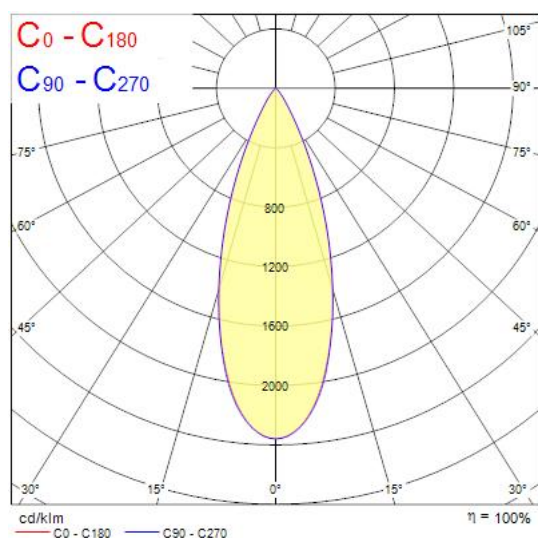

Technical drawings

