


# Concord

## CONCORD BEACON 2700K WIDE DALI BLACK 2062538

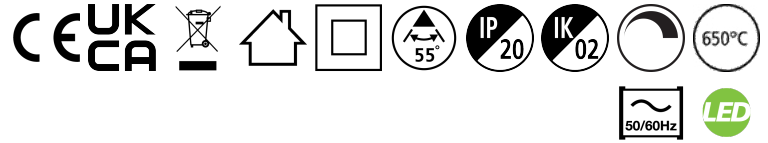

### Features

- Simple and slick integral design with no driver box and without any visible screws

New technology utilization for improved performance  
Invisible in-track adaptor for an impressive architectural look  
Extremely precise light beams due to the high-quality lenses  
#80mm die-cast aluminium body, Fix beam angle: 55° , Textured black finishing colour  
Light color temperature: 2700K, candle light  
System power: 18W, Fixture lumen output: 1250lm, efficacy: 69lm/W, Ra97 typical, LED chromacity: 2 step MacAdam ellipse LED source (SDCM2), IR/UV free light source without heat radiation  
Operating voltage 220-240V / 50-60Hz, electronic driver, DALI dimmable  
Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet.  
Compatible with OneTrack  
Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only  
Horizontal rotation: 355°, vertical tilt: 90°  
Nominal product dimensions: D.80mmx200mm  
5 years warranty. Suitable for track mounting

### Product Overview


Product name	CONCORD BEACON 2700K WIDE DALI BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Fixture rating	Enclosed
General application	Museums & Galleries, Retail, Hospitality
ETIM Class	EC001744
Fixture luminous flux (lm)	1250
Luminaire efficacy (lm/W)	69

# Concord

## CONCORD BEACON 2700K WIDE DALI BLACK 2062538

LOR (%)	100
Correlated colour temperature (k)	2700
Light colour	Candlelight
CRI (Ra)	97
Colour Variation Initial (SDCM)	2
Beam Angle (°)	55
Photobiological Risk Group	RG1
Total power consumption (W)	18
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768625383
Warranty	5 years
Dimming method	DALI
Useful luminous flux (#use)	1250

### Photometry

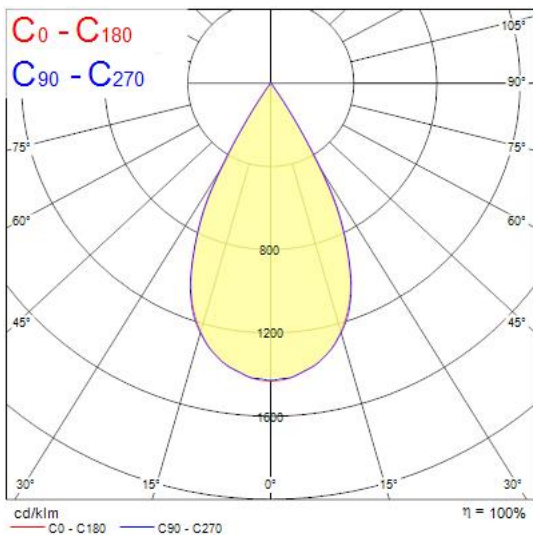

### Technical drawings

