



Data Sheet | Item Number: 826-161

Feedthrough terminal block; Conductor/conductor connection; Plate thickness: 1 ... 4 mm; 4 mm²; Pin spacing 7 mm; 1-pole; CAGE CLAMP®; 4,00 mm²; gray

<https://www.wago.com/826-161>

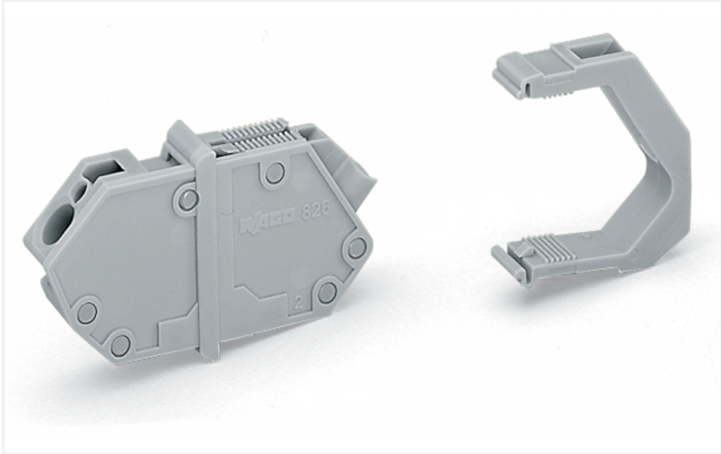

Color: ■ gray

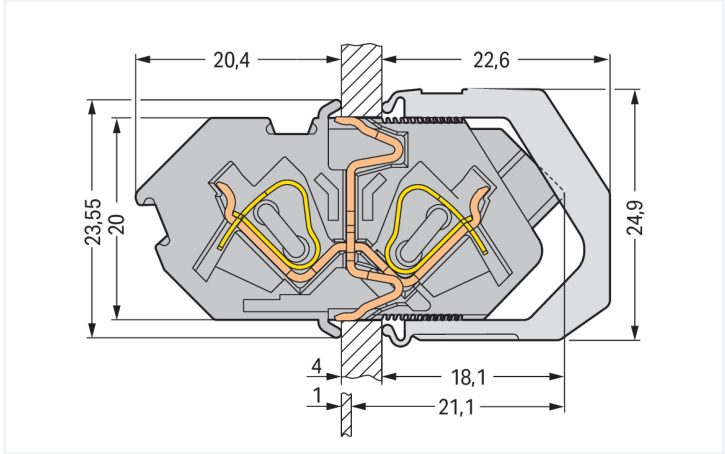

Dimensions in mm
Cut-out dimensions: H = 20.1+0.1 mm; L = (pole no. x 7 mm) + 1.6+0.1 mm

Durchführungsklemme Serie 826 mit CAGE CLAMP®

Die Durchführungsklemme (Artikelnummer 826-161) ermöglicht eine schnelle und sichere Verdrahtung. Unsere Durchführungsklemmen gewähren Ihnen die größtmögliche Flexibilität bei verschiedenen Montagearten. Für den Leiteranschluss werden bei dieser Durchführungsklemme Abisolierlängen von 9 bis 10 mm benötigt. Dieses Produkt ist mit 2 Leiteranschlüssen sowie der CAGE CLAMP®-Technologie ausgestattet. Mit dem CAGE CLAMP® Universalanschluss steht Ihnen eine zuverlässige und wartungsfreie Anschlusstechnik zur Verfügung, um sämtliche Leiterarten mithilfe einer Käfigzugfeder anzuschließen. Es ist keine Vorbehandlung der Leiter notwendig, beispielsweise durch das Aufcrimpen von Aderendhülsen. Die Abmessungen sind in Breite x Höhe x Tiefe (8,6 x 23,55 x 42,5) mm. In Abhängigkeit von der Leiterart eignet sich die Durchführungsklemme für Leiterquerschnitte von 0,08 mm² bis 4 mm². Die Kontaktoberfläche besteht aus Zinn. Für diese Durchführungsklemme erfolgt die Betätigung per Betätigungswerkzeug.

Notes	
Variants:	Other pole numbers Other colors Direct marking Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data			
Ratings per		IEC/EN 60664-1	
Overvoltage category		III	II
Pollution degree		3	2
Nominal voltage		320 V	630 V
Rated surge voltage		4 kV	4 kV
Rated current		32 A	32 A
Ratings per IEC/EN – Notes		Suitable for neutral-grounded, three-phase, 4-wire systems rated at 400 V (conductor-to-conductor) per IEC/EN 60664-1.	
Ratings (note)			

Approvals per		UL 1059	
Use group		B	D
Rated voltage		300 V	300 V
Rated current		20 A	10 A

Approvals per		CSA	
Use group		B	D
Rated voltage		300 V	300 V
Rated current		20 A	10 A



Connection data																		
Clamping units	2	Connection 1 <table><tr><td>Connection technology</td><td>CAGE CLAMP®</td></tr><tr><td>Actuation type</td><td>Operating tool</td></tr><tr><td>Solid conductor</td><td>0.08 ... 4 mm² / 28 ... 12 AWG</td></tr><tr><td>Fine-stranded conductor</td><td>0.08 ... 4 mm² / 28 ... 12 AWG</td></tr><tr><td>Fine-stranded conductor; with insulated ferrule</td><td>0.25 ... 2.5 mm²</td></tr><tr><td>Fine-stranded conductor; with uninsulated ferrule</td><td>0.25 ... 2.5 mm²</td></tr><tr><td>Strip length</td><td>9 ... 10 mm / 0.35 ... 0.39 inches</td></tr><tr><td>Pole number</td><td>1</td></tr></table>	Connection technology	CAGE CLAMP®	Actuation type	Operating tool	Solid conductor	0.08 ... 4 mm² / 28 ... 12 AWG	Fine-stranded conductor	0.08 ... 4 mm² / 28 ... 12 AWG	Fine-stranded conductor; with insulated ferrule	0.25 ... 2.5 mm²	Fine-stranded conductor; with uninsulated ferrule	0.25 ... 2.5 mm²	Strip length	9 ... 10 mm / 0.35 ... 0.39 inches	Pole number	1
Connection technology	CAGE CLAMP®																	
Actuation type	Operating tool																	
Solid conductor	0.08 ... 4 mm² / 28 ... 12 AWG																	
Fine-stranded conductor	0.08 ... 4 mm² / 28 ... 12 AWG																	
Fine-stranded conductor; with insulated ferrule	0.25 ... 2.5 mm²																	
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 2.5 mm²																	
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches																	
Pole number	1																	
Total number of potentials	1																	
Number of connection types	2																	
Number of levels	1																	
Physical data																		
Pin spacing	7 mm / 0.276 inches																	
Width	8.6 mm / 0.339 inches																	
Height	23.55 mm / 0.927 inches																	
Depth	42.5 mm / 1.673 inches																	
Mechanical data																		
Housing sheet thickness	1 ... 4 mm / 0.039 ... 0.157 inches																	
Mounting type	Locking claw Feed-through mounting																	
Material data																		
Note (material data)	Information on material specifications can be found here																	
Color	gray																	
Material group	I																	
Insulation material (main housing)	Polyamide (PA66)																	
Flammability class per UL94	V0																	
Clamping spring material	Chrome-nickel spring steel (CrNi)																	
Contact material	Electrolytic copper (E _{cu})																	
Contact Plating	Tin																	
Fire load	0.23 MJ																	
Weight	6.4 g																	
Environmental requirements																		
Limit temperature range	-60 ... +105 °C																	
Processing temperature	-35 ... +60 °C																	
Commercial data																		
Product Group	4 (Printed Circuit Connectors)																	
eCl@ss 10.0	27-14-11-06																	
eCl@ss 9.0	27-14-11-06																	
ETIM 9.0	EC001284																	
ETIM 8.0	EC001284																	
PU (SPU)	50 pcs																	
Packaging type	Box																	
Country of origin	DE																	
GTIN	4044918532457																	
Customs tariff number	85369010000																	



Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	-	2160584.32	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	-	NTR NL-7136	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UL UL International Germany GmbH	UL 1059	E45172			

Approvals for marine applications

Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	EN 60947	20-HG1941090-PDA
BV Bureau Veritas S.A.	EN 60947	07436/F0 BV
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001V2
LR Lloyds Register	IEC 61984	96/20035 (E5)

Downloads

Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 826-161	

Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	



CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 826-161 	EPLAN Data Portal 826-161 
	ZUKEN Portal 826-161 

1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule

 Item No.: 216-241 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white	 Item No.: 216-141 Ferrule; Sleeve for 0.5 mm² / 20 AWG; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92	 Item No.: 216-242 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray	 Item No.: 216-262 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray
 Item No.: 216-142 Ferrule; Sleeve for 0.75 mm² / 18 AWG; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92	 Item No.: 216-243 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red	 Item No.: 216-263 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red	 Item No.: 216-143 Ferrule; Sleeve for 1 mm² / AWG 18; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92
 Item No.: 216-244 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black	 Item No.: 216-264 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black	 Item No.: 216-284 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black	 Item No.: 216-144 Ferrule; Sleeve for 1.5 mm² / AWG 16; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92; silver-colored
 Item No.: 216-246 Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue	 Item No.: 216-266 Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue	 Item No.: 216-286 Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue	 Item No.: 216-106 Ferrule; Sleeve for 2.5 mm² / AWG 14; un-insulated; electro-tin plated; silver-colored

1.1.2 Marking

1.1.2.1 Marking strip

 Item No.: 210-332/700-103 Marking strips; as a DIN A4 sheet; MARKED; 1-12 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white	 Item No.: 210-332/700-102 Marking strips; as a DIN A4 sheet; MARKED; 12-1 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white
--	--

1.1.3 Test and measurement

1.1.3.1 Testing accessories



Item No.: 210-136
Test plug; 2 mm Ø; with 500 mm cable; red

1.1.4 Tool

1.1.4.1 Operating tool




Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured



Item No.: 210-657
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short; multicoloured

Installation Notes

Conductor termination




Inserting a conductor.


Installation



Insert the terminal strip into the cutout until the stop hits the enclosure wall.



Secure the terminal strip to the inner side of the cutout via retaining clips.





Push retaining clips until stop and press together in the direction of the terminal strip center.

Testing



Testing with 2 mm or 2.3 mm Ø test plug.


Marking



Labeling via Mini-WSB makers – directly on the terminal blocks.

Self-adhesive marking strips adhere directly on the retaining clips.

Application



Automatic, double contact of the ground contact to the enclosure wall