




Features

- LED Lantern complete with 48mm side entry spigot and supplied with 0.5 metre mains supply cable, die-cast aluminium housing, polycarbonate cover, IP66, IK08, Class I, 4000K (Neutral White), Non-dimmable, 3500lm, 30W, 117lm/W, CRI80, Lifespan 90,000hrs L70:B50, (LxWxD) 359 x 161 x 80mm.

Product Overview

Product name	Zephyr Small 3500LM 4K CLI Grey
Technology	LED
Cap/Base	N/A
Housing	Aluminium
E-number FI	4579585
Fixture luminous flux (lm)	3500
Luminaire efficacy (lm/W)	117
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG1
Total power consumption (W)	30
Electrical protection	Class I
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288500775
Warranty	5 years

Photometry

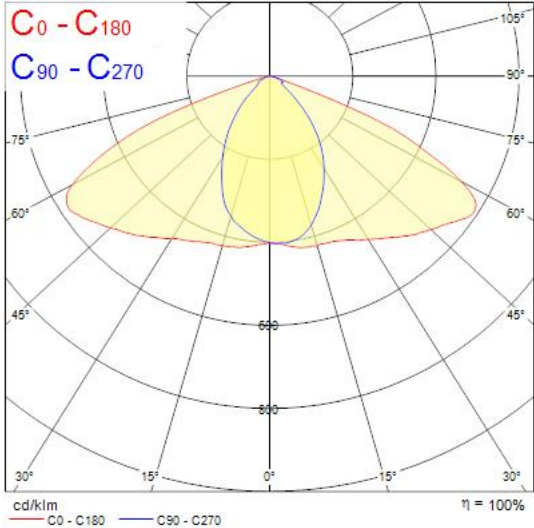

Technical drawings

