


Data Sheet | Item Number: 267-435

Conductor support, cover; with direct ground contact; 5-pole; 2,50 mm²; white

<https://www.wago.com/267-435>

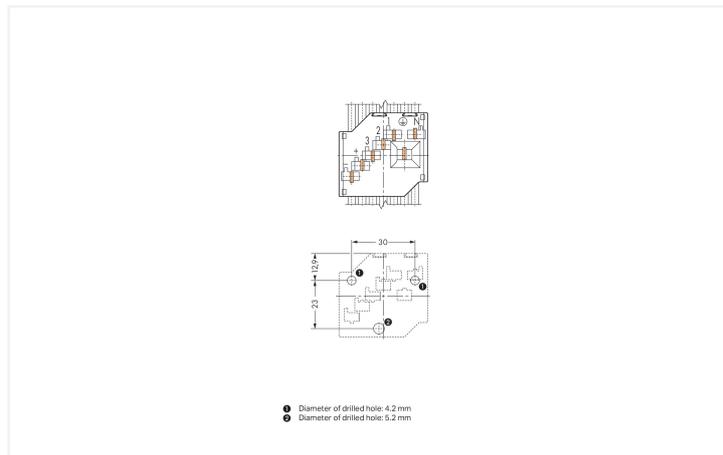

Color: ■ white

Similar to illustration

Dimensions in mm

1) Diameter of drilled hole: 4.2 mm 2) Diameter of drilled hole: 5.2 mm

Conductor support, 267 Series, white

Error-free electrical installations are guaranteed with conductor support (item number 267-435). Ensure that the strip lengths are 8 mm when connecting conductors to conductor support. Depending on the conductor type, conductor support is ideal for conductor cross sections ranging from 0.5 mm² to 1 mm².

Tin is used for coating the contact surfaces.

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated impulse withstand voltage	-	4 kV	-
Rated current	-	6 A	-

Connection Data

Number of connection types	1
----------------------------	---

Connection 1	
Solid conductor	0.5 ... 1 mm ²
Strip length	8 mm / 0.31 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact Plating	Tin
Fire load	0.22 MJ
Weight	10.6 g

Environmental requirements

Temperature stability	105 °C
-----------------------	--------

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	PL
GTIN	4044918997829
Customs tariff number	85369010000

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	NL-47718
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-100641
UL UL International Germany GmbH	UL 1977	E45171

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 267-435



Documentation

Additional Information

Technical Section

03.04.2019

pdf

2027.26 KB



CAD/CAE-Data

CAD data

2D/3D Models 267-435



CAE data

ZUKEN Portal 267-435

