




GWP30021 - DALI
GWP30022 - DMX

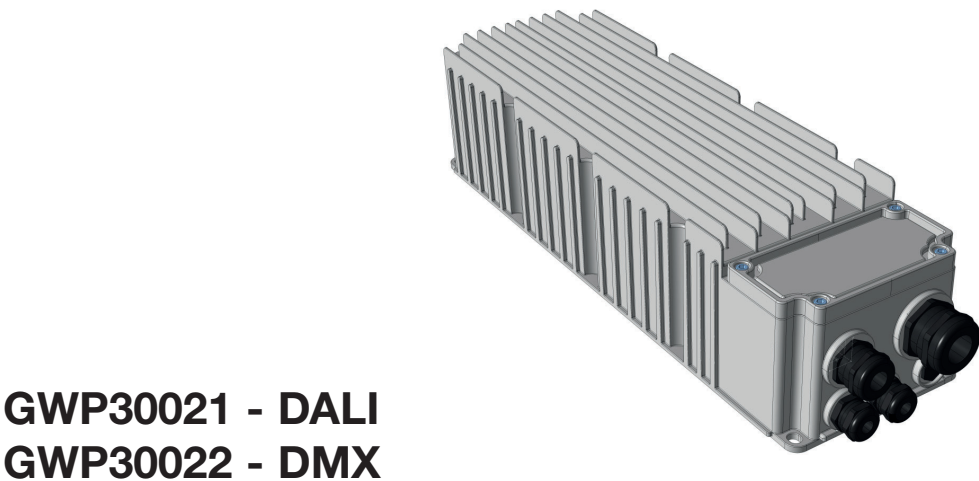

IP66

V	I	Uout
220-400V 50/60 Hz	Max 1,2 A	Max 600 V $\overline{\text{~}}$

Kg 6,1 kg

GWP30021 - DALI

PINOUT	
Label	
L1	AC L1 IN
L2	AC L2 IN
	PE
DA	DALI IN
DA	DALI relaunch
DA	DALI IN
DA	DALI relaunch
	PE LED MODULE
NTC	NTC
+1	LED1+
-1	LED1-
+3	LED3+
-3	LED3-

220-400V
50/60Hz

$\longleftrightarrow$ DALI $\rightarrow$

GWP30022 - DMX

DMX address default: 1

PINOUT	
Label	
L1	AC L1 IN
L2	AC L2 IN
	PE
A	DMX A INPUT DATA+
A	DMX A RE-LAUNCH DATA+
B	DMX B INPUT DATA-
B	DMX B RE-LAUNCH DATA-
S	DMX shield
S	DMX shield
	PE LED MODULE
NTC	NTC
+1	LED1+
-1	LED1-
+3	LED3+
-3	LED3-

220-400V
50/60Hz

$\longleftrightarrow$ DMX $\rightarrow$




PINOUT	
Label	
L1	AC L1 IN
L2	AC L2 IN
	PE
A	DMX A INPUT DATA+
A	DMX A RE-LAUNCH DATA+
B	DMX B INPUT DATA-
B	DMX B RE-LAUNCH DATA-
S	DMX shield
S	DMX shield
	PE LED MODULE
NTC	NTC
+1	LED1+
-1	LED1-
+3	LED3+
-3	LED3-



GWP30001




	
4 x M8	DIN 127

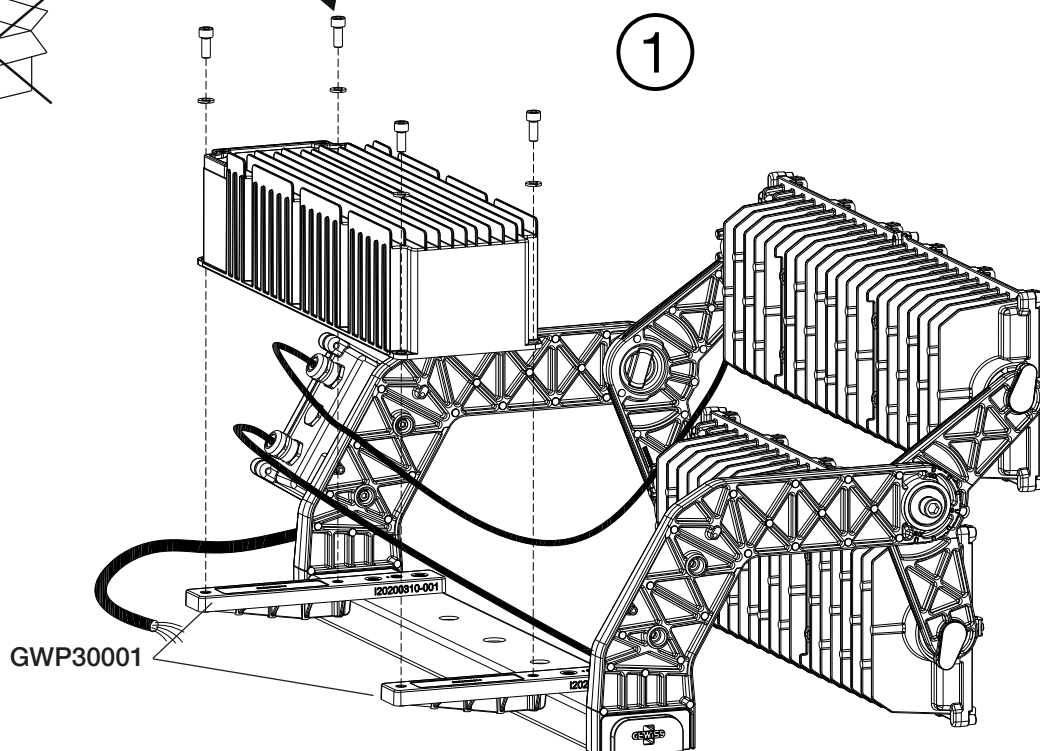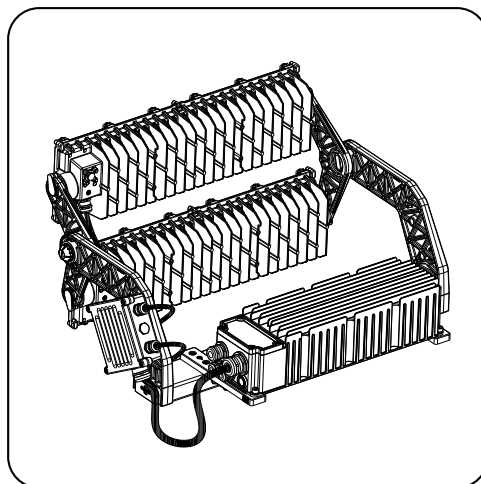




10 Nm

2

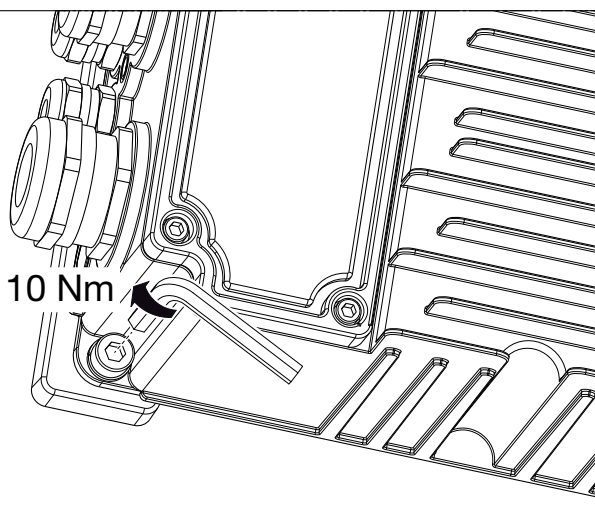




t_c max: 75°C

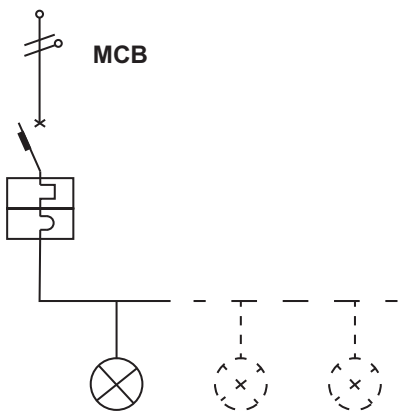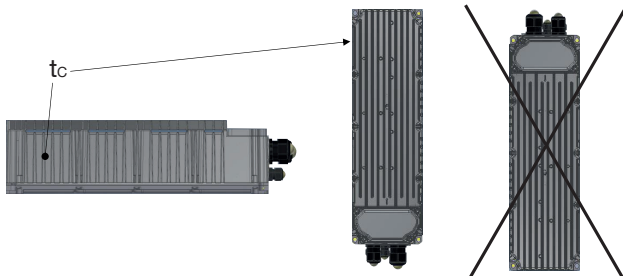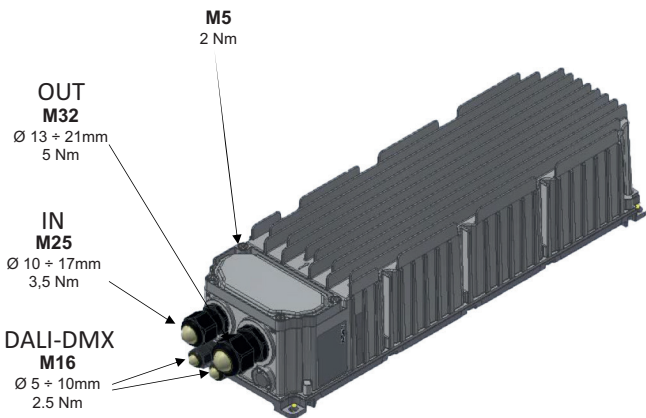


Inrush Current		
V _{in}	I _{peak}	Half Value Time
230 Vac	40 A	2,5 ms
400 Vac	68 A	2 ms


Max Nr. GWP30021/22 - 230 V				
MCB:	10A	16A	20A	25A
Type B	1	1	2	2
Type C	1	1	2	2
Type D	1	1	2	2

Max Nr. GWP30021/22 - 400 V				
MCB:	10A	16A	20A	25A
Type B	0	1	1	1
Type C	1	1	2	3
Type D	1	2	2	3


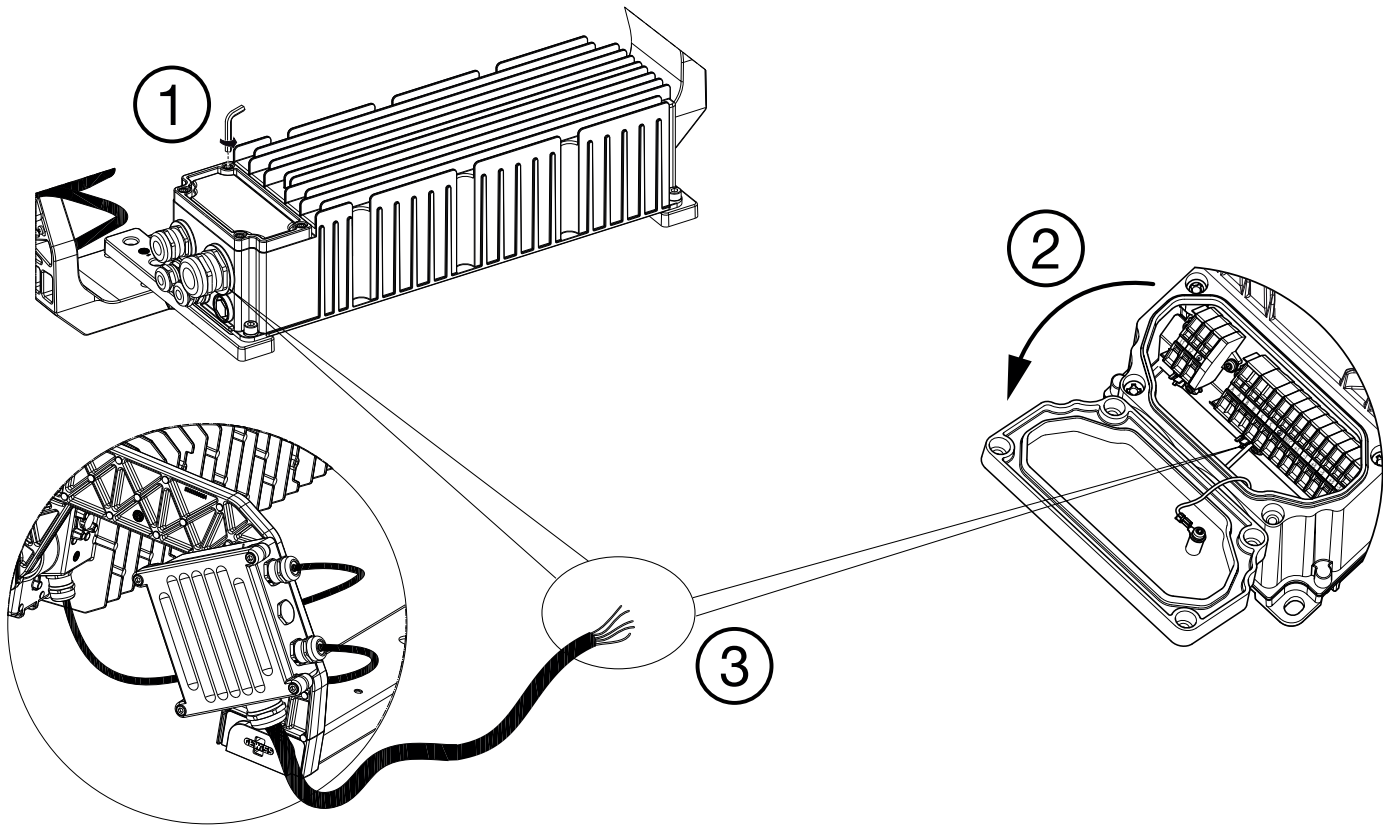


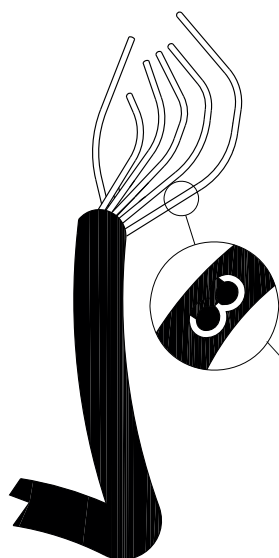


GWP30022 - DMX

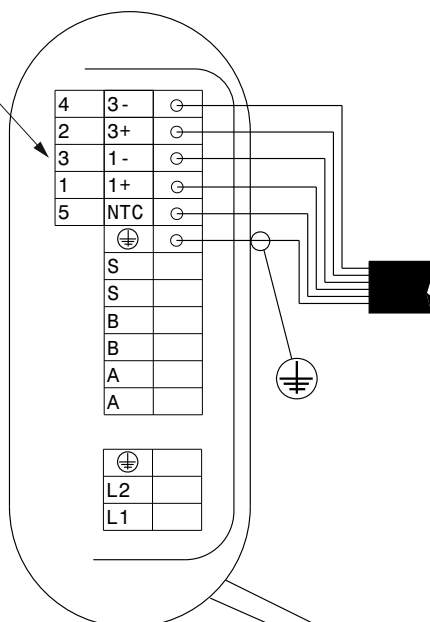

GWP30021 - DALI



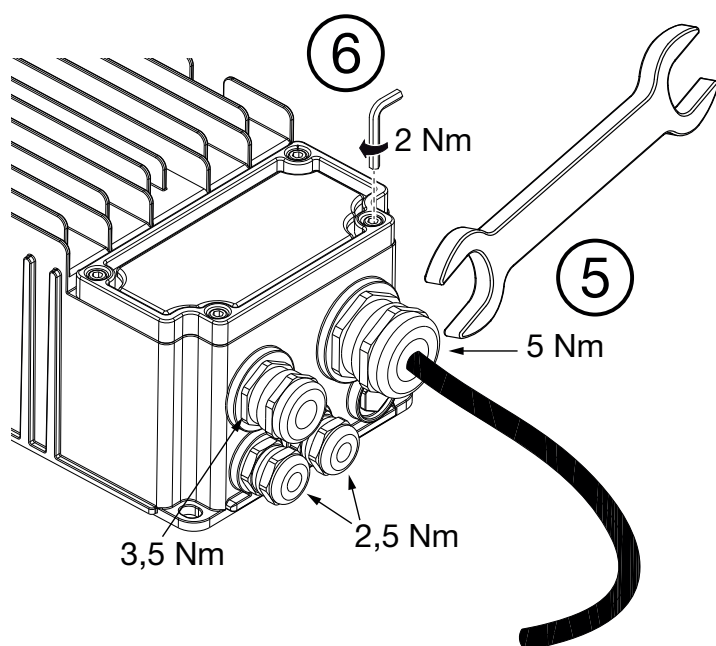
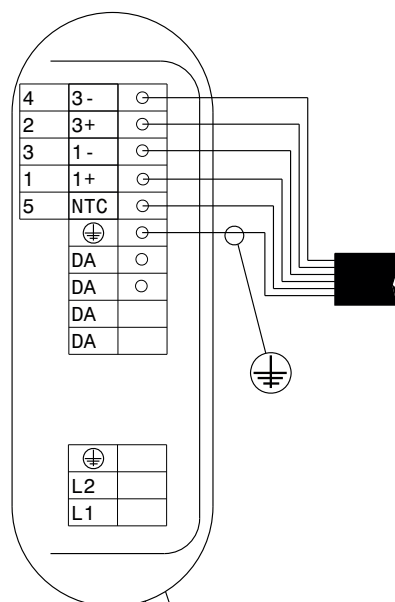


4







GWP30008

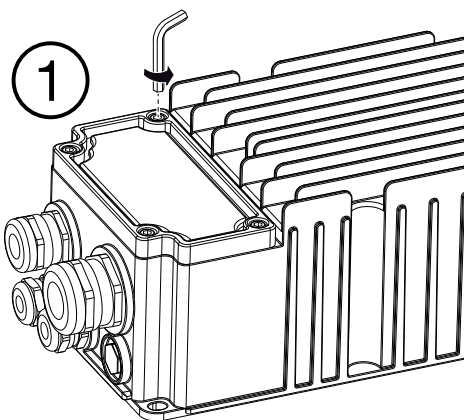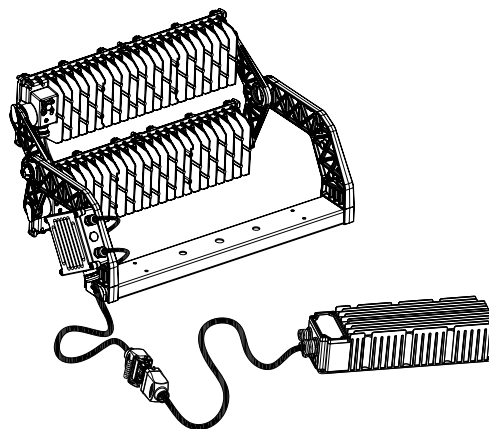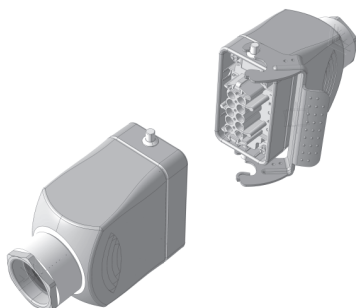


3

Ø15,2 ÷ 15,9 mm

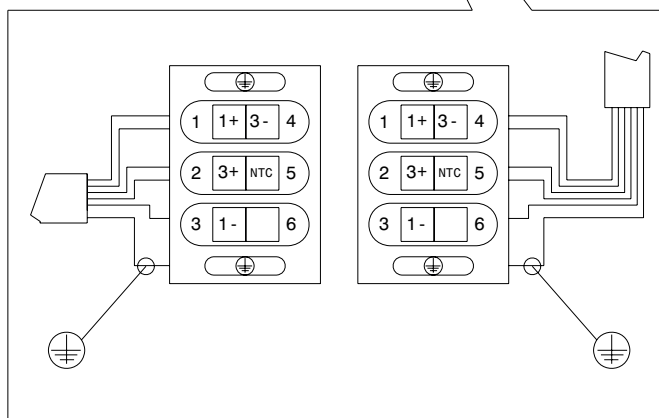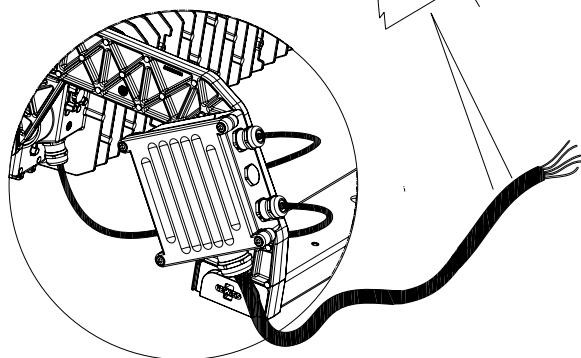



H07RN-F 6x1,5 (Max 50 m)

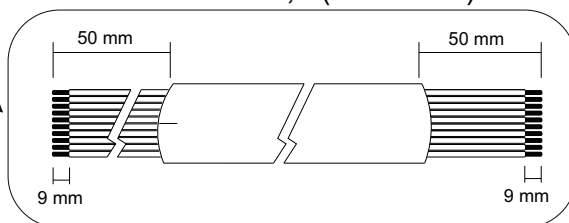


GWP30022 - DMX




4	3-	○
2	3+	○
3	1-	○
1	1+	○
5	NTC	○
	⊕	○
S		
S		
B		
B		
A		
A		
	⊕	
L2		
L1		


GWP30021 - DALI

4	3-	○
2	3+	○
3	1-	○
1	1+	○
5	NTC	○
	⊕	○
DA		○
DA		○
DA		
DA		
	⊕	
L2		
L1		

4



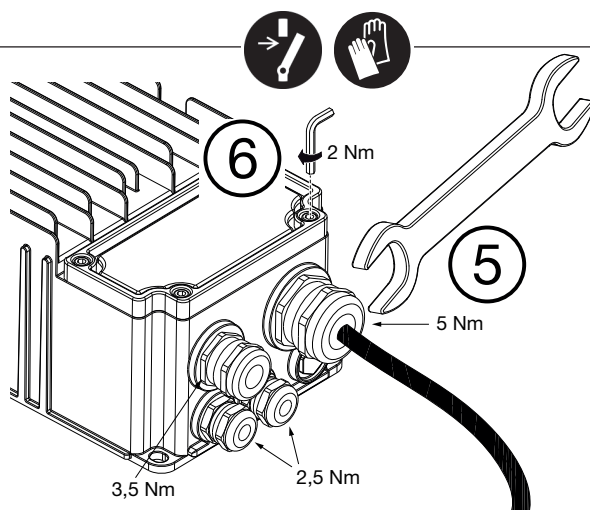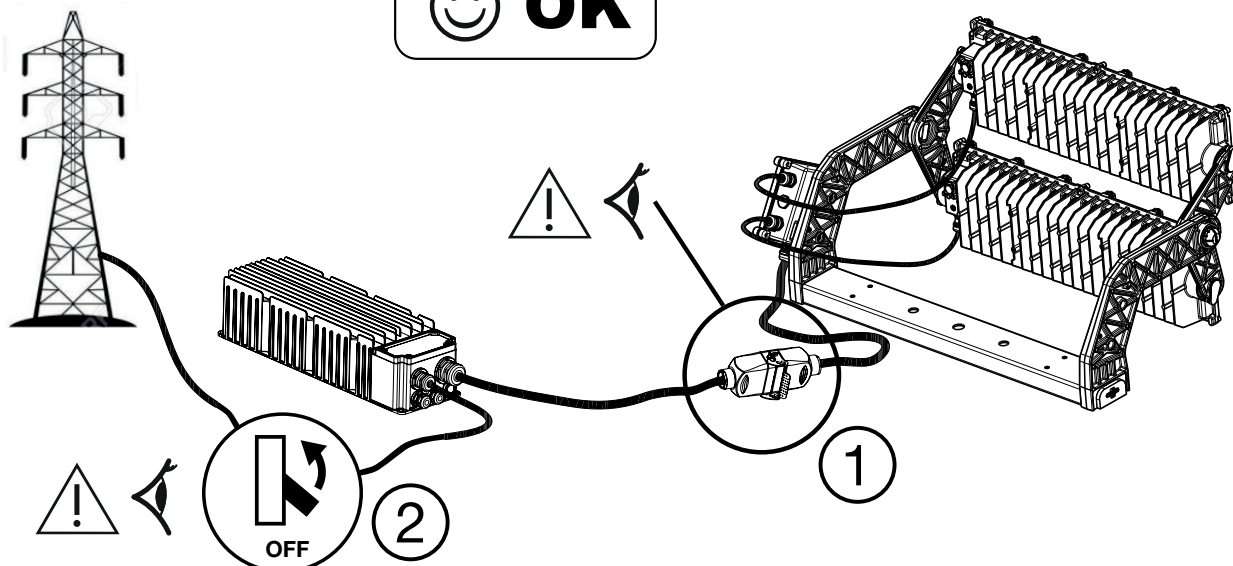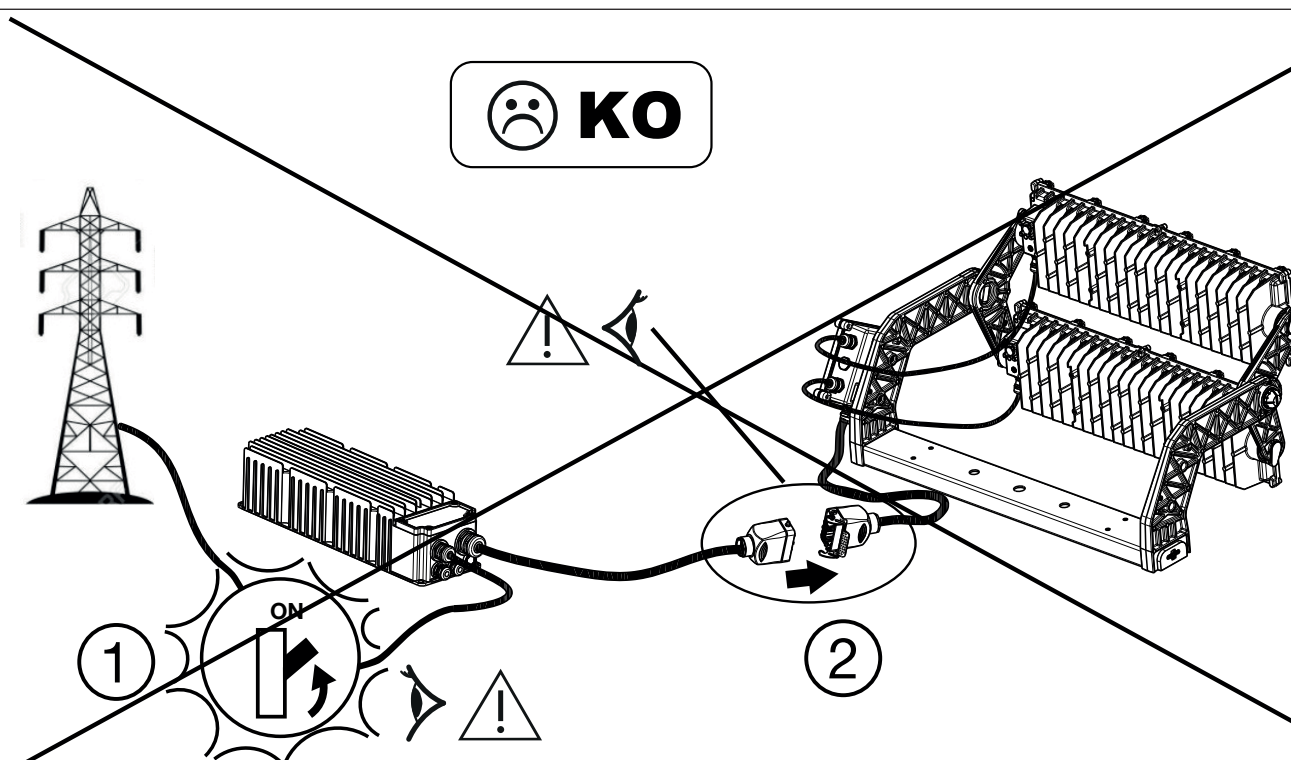 **OK** **KO**

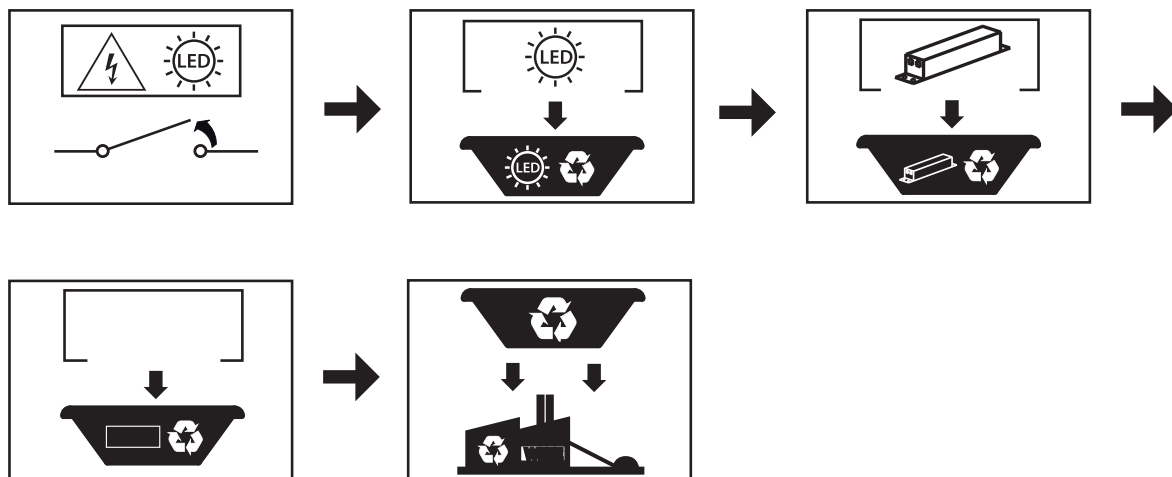

7613000244

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:

Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com

According to applicable UK regulations, the company responsible for placing the goods in UK market is:

GEWISS U.K. LTD - Unity House, Compass Point Business Park, 9 Stockbridge way, St. Ives
Cambridgeshire, PE27 5JL, United Kingdom tel: +44 1954 712757 E-mail: gewiss-uk@gewiss.com



+39 035 946 111
8.30 - 12.30 / 14.00 - 18.00
lunedì ÷ venerdì - monday ÷ friday



+39 035 946 260



sat@gewiss.com
www.gewiss.com

ULTIMA REVISIONE 01/2022