

Myriad Adjustable Round - Black with Silver bezel

MYRIAD ADJ ROUND BLACK 2700K PHDIM SILVER BZ
2058035



PRODUCT OVERVIEW

Product name	MYRIAD ADJ ROUND BLACK 2700K PHDIM SILVER BZ
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
Warranty	5 years
Fixture luminous flux (lm)	567
Luminaire efficacy (lm/W)	57
LOR (%)	100
Colour temperature (K)	2700
Light colour	Candlelight
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Housing colour	Black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768580354

DATA TABLE

General data

Product name	MYRIAD ADJ ROUND BLACK 2700K PHDIM SILVER BZ
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor

Myriad Adjustable Round - Black with Silver bezel

MYRIAD ADJ ROUND BLACK 2700K PHDIM SILVER BZ
2058035

Performance ambient temperature Tq (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	567
Luminaire efficacy (lm/W)	57
LOR (%)	100
Colour temperature (K)	2700
Light colour	Candlelight
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	230
Electrical protection	Class II
Drive current (mA)	350
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

Physical data


Housing colour	Black
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	76
Max. Lamp Diameter (mm) - D	90
Weight (kg)	0.38
Recessed Depth (mm)	115

Packaging

Single packaging type	Carton
Product EAN number	5025768580354
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768580354
Packaging outer length / height (cm)	17.5

PHOTOMETRY

Myriad Adjustable Round - Black with Silver bezel MYRIAD ADJ ROUND BLACK 2700K PHDIM SILVER BZ 2058035

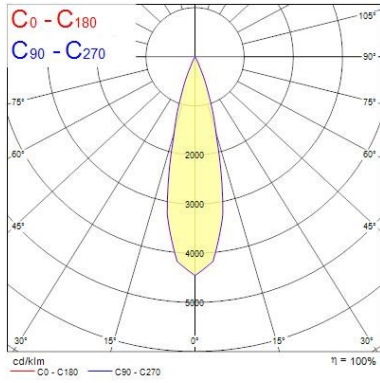

0.5	0.23	E(0°) E(C0)	12099 4705
1.0	0.47	E(0°) E(C0)	2525 1175
1.5	0.70	E(0°) E(C0)	1122 523
2.0	0.94	E(0°) E(C0)	631 294
2.5	1.17	E(0°) E(C0)	404 188
3.0	1.41	E(0°) E(C0)	281 131

Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 26.4°)

TECHNICAL DRAWINGS

