

## Features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 1425 - 2500lm (selected by DIP switches); 9.5 - 16W; 150 - 159lm/W; 4000K; SDCM<3; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 650mm x 89mm x 88mm; D-mark.


## Product Overview

Product name	RESISTO 600 HE IP66 1425-2500LM 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4357165
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	156
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	110
Glare control	< 24
Photobiological Risk Group	RG1

## RESISTO 600 HE IP66 1425-2500LM 840 0010329

Total power consumption (W)	16
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288103297
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	2500

### Photometry

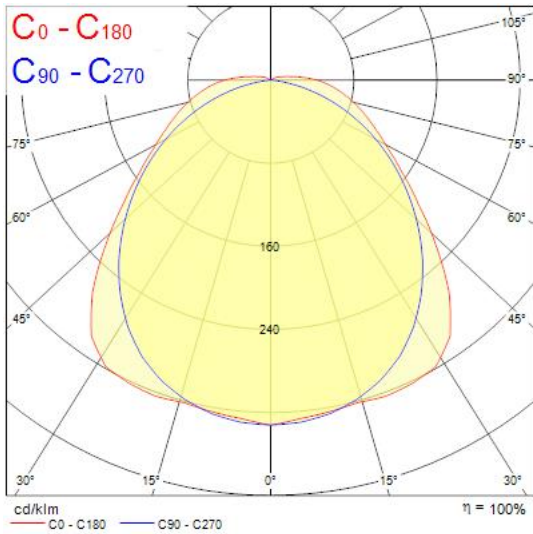

### Technical drawings

