


Concord

COLOSSAL 900mm 830 OPAL DIR+HAL WHITE DALI EM 2071258

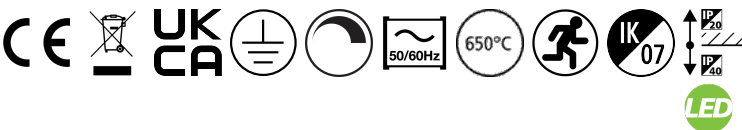

Features

- 900mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct/indirect (halo) light distribution, 10505lm luminous flux, 78.5W system power, 134lm/W luminaire efficacy. DALI dimmable. 3 hours integrated emergency. Colour rendering index Ra >80, 3000K Warm White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40/IP20, IK03. 450mA drive current. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.

Product Overview


Product name	COLOSSAL 900mm 830 OPAL DIR+HAL WHITE DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture luminous flux (lm)	10505
Luminaire efficacy (lm/W)	135
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	77.7
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)

Concord


COLOSSAL 900mm 830 OPAL DIR+HAL WHITE DALI EM 2071258

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5025768712588
Warranty	5 years
Colour Code	830

Photometry

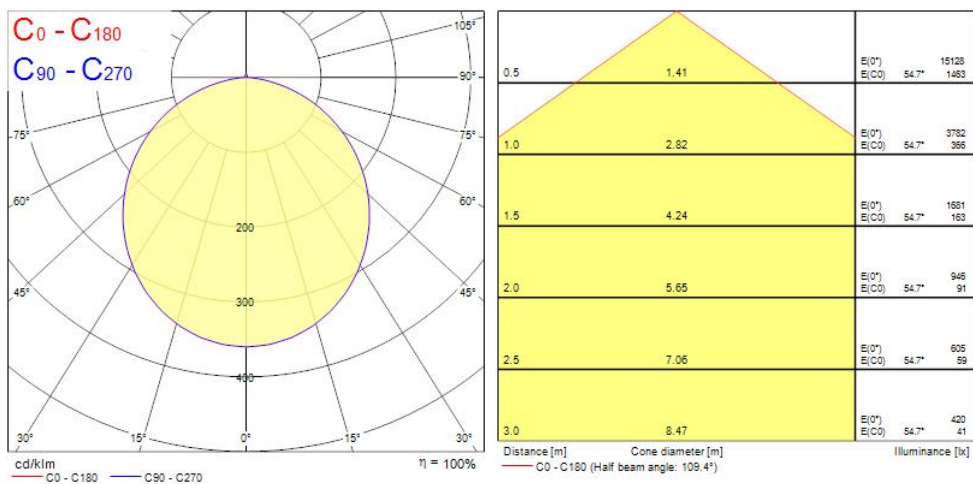

Technical drawings

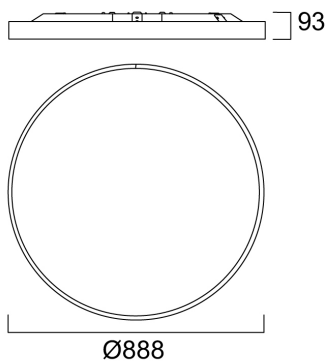

Concord

COLOSSAL 900mm 830 OPAL DIR+HAL WHITE DALI EM 2071258

Data table

GENERAL DATA

Product name	COLOSSAL 900mm 830 OPAL DIR+HAL WHITE DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Operating temperature range (°C)	5°C...+25°C
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	10505
Luminaire efficacy (lm/W)	135
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 22
Photobiological Risk Group	RG0
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	77.7
Current (A)	450
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	450

COLOSSAL 900mm 830 OPAL DIR+HAL WHITE DALI EM 2071258

Inrush Current (A)	25
Inrush Duration (µs)	280
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	24
Max. products per 20A B Breaker	30
Connectable conductor cross section - Min (mm²)	1.5
Connectable conductor cross section - Max (mm²)	2.5

LIFETIME DATA

Lifespan L70 B50	170000
Lifespan L80 B20	145000
Lifespan L90 B10	66000

PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Diameter (mm)	888
Weight (kg)	17.0

PACKAGING

Single packaging type	Carton
Product EAN number	5025768712588
Packaging single width (cm)	96.0
Packaging single depth (cm)	96.0
DUN14 (outer)	05025768712588

Concord

COLOSSAL 900mm 830 OPAL DIR+HAL WHITE DALI EM
2071258

Packaging outer length / height (cm)	14.0
--------------------------------------	------

SAFETY DATA

Optimal operating condition (°C)	5-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No