


Start Flood Flat without PIR

Start Flood Flat IP65 950LM 830 Black
0050105

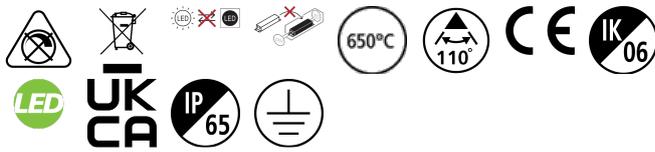

PRODUCT OVERVIEW


| | |
|---------------------------------|---------------------------------------|
| Product name | Start Flood Flat IP65 950LM 830 Black |
| Technology | LED |
| Cap/Base | N/A |
| E-number FI | 4579526 |
| Warranty | 3 years |
| Fixture luminous flux (lm) | 950 |
| Luminaire efficacy (lm/W) | 106 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM5 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 9 |
| Electrical protection | Class I |
| LED Flickering Rate | Low (6% - 20%) |
| Housing colour | Black |
| IP rating | IP65 |
| IK rating | IK06 |
| Product EAN number | 5410288501055 |

PHOTOMETRY

| Distance [m] | Core diameter [m] | E107 | E108 | E109 | E110 |
|--------------|-------------------|------|------|------|------|
| 0.5 | 1.45 1.22 | 1833 | 104 | 194 | |
| 1.0 | 2.97 2.43 | 382 | 33 | 48 | |
| 1.5 | 4.45 3.65 | 170 | 15 | 22 | |
| 2.0 | 5.93 4.87 | 96 | 7 | 12 | |
| 2.5 | 7.41 6.05 | 61 | 5 | 8 | |
| 3.0 | 8.90 7.30 | 42 | 4 | 6 | |

Distance [m] Core diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 105.0°)
— C90 - C270 (Half beam angle: 112.0°)



Start Flood Flat without PIR

Start Flood Flat IP65 950LM 830 Black
0050105

TECHNICAL DRAWINGS

