


PRO

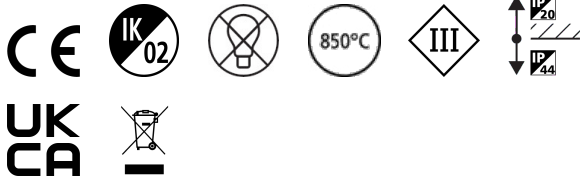

0.5	0.07	850 E.C.O. L1*	6020 6003
1.0	0.14	850 E.C.O. L1*	4704 3275
1.5	0.22	850 E.C.O. L1*	3031 2033
2.0	0.29	850 E.C.O. L1*	2241 1519
2.5	0.36	850 E.C.O. L1*	1686 1132
3.0	0.43	850 E.C.O. L1*	1253 831

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (half beam angle: 9.2°)

