

## START DOWNLIGHT IP44 175


START Downlight 175 IP44 1425lm 830

0030326



### Product features

- Ceiling recessed LED downlight IP44 (from the front), perfect where limited ceiling void is available with only 55mm product depth and 175mm cutout. Ideal replacement for 1x32W/2x18W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 1425LM, 15W, 95lm/W, 3000K, Driver Current: 390mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP44 from the front, IK07, (HxW) 55x195mm, Class 2, 220-240V. Meets TP(a) requirements.

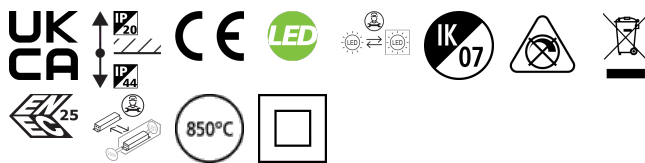

### PRODUCT OVERVIEW

Product name	START Downlight 175 IP44 1425lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278147
Warranty	5 years
Fixture luminous flux (lm)	1425
Luminous flux (lm)	1425
Luminaire efficacy (lm/W)	95
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	15
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9010 - Pure white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303260

## START DOWNLIGHT IP44 175

*START Downlight 175 IP44 1425lm 830*  
0030326

### DATA TABLE

#### General data

Product name	START Downlight 175 IP44 1425lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	40
ETIM Class	EC001744
E-number FI	4278147
Warranty	5 years

#### Optical data

Fixture luminous flux (lm)	1425
Luminous flux (lm)	1425
Luminaire efficacy (lm/W)	95
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	74
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

#### Electrical data

Total power consumption (W)	15
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>100000
Dimmable	No
Dimming method	N/A
Drive current (mA)	390
Inrush Current (A)	7.52
Inrush Duration (µs)	830
Glow Wire Test (°C)	850

## START DOWNLIGHT IP44 175

*START Downlight 175 IP44 1425lm 830*

0030326

Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	22
Max. products per 13A C Breaker	27
Max. products per 16A C Breaker	34
Max. products per 20A C Breaker	42
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	16
Max. products per 16A B Breaker	20
Max. products per 20A B Breaker	25
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.5
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	74000
Lifespan L90 B10	34000

### Physical data

Housing colour	RAL 9010 - Pure white
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Height (mm)	55
Nominal Product Diameter (mm)	193
Cutout Dimensions (W x L in mm or Diameter in mm)	175
Weight (kg)	0.371
Recessed Depth (mm)	150

### Packaging

Single packaging type	Carton
Product EAN number	5410288303260
Packaging single length / height (cm)	20.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	6.8
DUN14 (outer)	15410288303267
Units per outer package	16
Packaging outer length / height (cm)	56.8
Packaging outer width (cm)	42.0
Packaging outer depth (cm)	22.5

### Safety data

Optimal operating condition (°C)	-10-40
----------------------------------	--------

## START DOWNLIGHT IP44 175


*START Downlight 175 IP44 1425lm 830*  
0030326

### PHOTOMETRY

0.5	0.81	E(0°) E(C0)	39.1°	3141 735
1.0	1.63	E(0°) E(C0)	39.1°	785 184
1.5	2.44	E(0°) E(C0)	39.1°	349 82
2.0	3.25	E(0°) E(C0)	39.1°	196 45
2.5	4.06	E(0°) E(C0)	39.1°	125 29
3.0	4.89	E(0°) E(C0)	39.1°	87 20

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 75.2°)

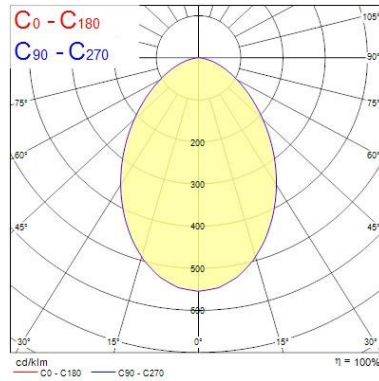

### TECHNICAL DRAWINGS

