


Product Specifications

Product Family	Zybernet
Category	Cat.6A/7A
Product	Junction Box Cat.6A/7A FTP LSA+
Item no.	ZN500CB121



Approvals

ANSI/TIA/EIA 568 C.2



ISO/IEC 11801

Applications & Features

✓ T568A & T568B wiring Printing on IDC

✓ The Cat.6A transmission performance is in compliance with the ANSI/TIA/EIA 568 C.2 standard.

Product drawings

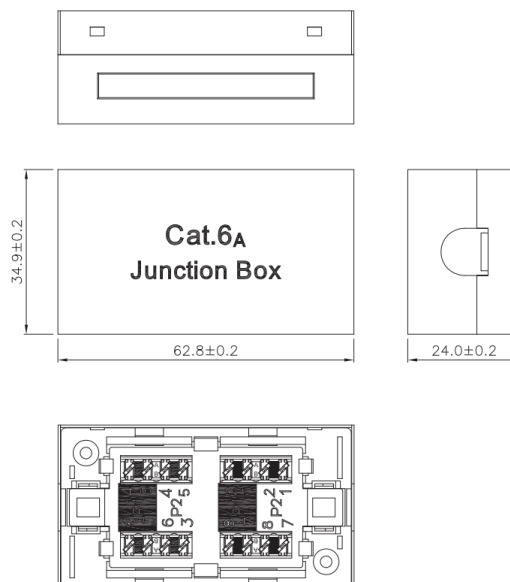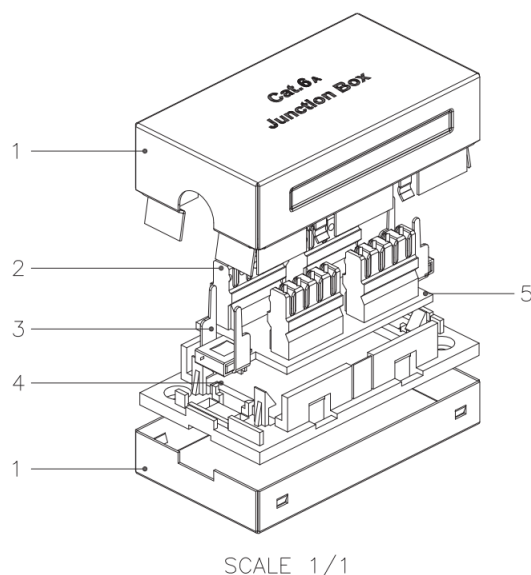

Physical properties

Materials

1. Metal Cover

2. IDC

3. Cable Holder

4. Housing

5. PCB

SPCC, 0.5 mm thickness with Nickel plated.

2-1. Housing : PC, UL 94V-2.

2-2. Terminal: Phosphor Bronze with Tin plated.

Phosphor Bronze 0.5 mm thickness with Nickel plated.

ABS+PC, UL 94V-0.

FR4, UL 94V-0.

Performance

Operating temperature
IDC

-10°C to 60°C

Suitable for 22-26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tool

