

Data Sheet | Item Number: 713-1118/037-9037


1-conductor female connector, 2-row; CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 36-pole; 100% protected against mismatching; Levers; direct marking; 1,50 mm²; black

<https://www.wago.com/713-1118/037-9037>



Color: ■ black


Similar to illustration

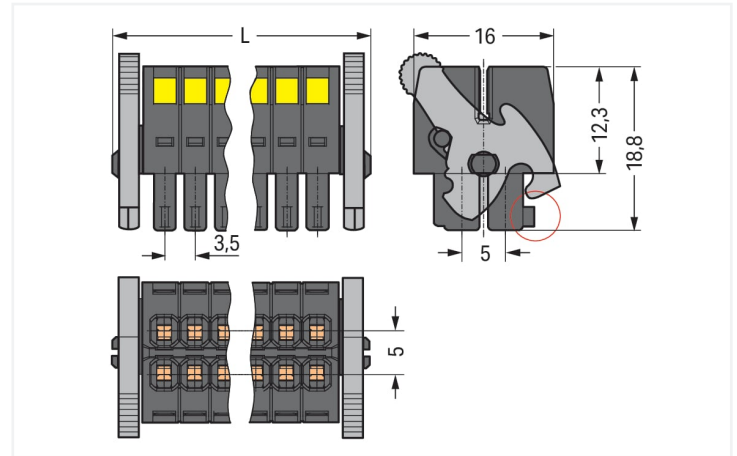

Dimensions in mm

$L = [(pole\ no./2) - 1] \times pin\ spacing + 12.2\ mm$

Coding finger (red circle)

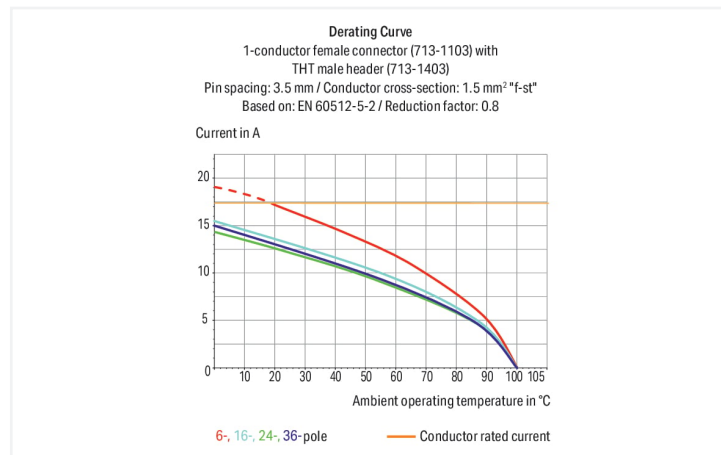

Federleiste/Buchse Serie 713 mit CAGE CLAMP®

Die Federleiste/Buchse hat die Artikelnummer 713-1118/037-9037 und ermöglicht eine fehlerfreie Elektroinstallation. Unsere Leiterplatten-Steckverbinder ermöglichen Ihnen die größtmögliche Flexibilität bei verschiedenen Montagearten. Diese Federleiste/Buchse benötigt für den Leiteranschluss eine Abisolierung mit Längen zwischen 6 und 7 mm. Bei diesem Produkt findet die CAGE CLAMP®-Technologie Verwendung. Mit dem CAGE CLAMP® Universalanschluss steht Ihnen eine zuverlässige und wartungsfreie Anschlusstechnik zur Verfügung, um sämtliche Leiterarten mithilfe einer Käfigzugfeder anzuschließen. Es ist keine Vorbehandlung der Leiter notwendig, beispielsweise durch das Aufcrimpen von Aderendhülsen. In Breite x Höhe x Tiefe betragen die Abmessungen (71,5 x 18,8 x 16) mm. In Abhängigkeit von der Leiterart eignet sich die Federleiste/Buchse für Leiterquerschnitte von 0,08 mm² bis 1,5 mm². Die Kontaktoberfläche ist aus Zinn. Für diese Federleiste/Buchse erfolgt die Betätigung per Betätigungswerkzeug. Das MCS – "Multi Connection System" von WAGO ist ein vielfältiges Steckverbindersystem für Ihre durchgängige Systemverdrahtung. Es ermöglicht Ihnen eine vereinfachte Verdrahtung in der Kabelvorkonfektionierung und auf Geräten durch zwei Betätigungsrichtungen für die CAGE CLAMP®-Varianten.



Notes	
Safety Information	The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.
Variants:	Other pole numbers Gold-plated or partially gold-plated contact surfaces Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category	III	III	II	
Pollution degree	3	2	2	
Nominal voltage	80 V	160 V	250 V	
Rated surge voltage	2.5 kV	2.5 kV	2.5 kV	
Rated current	10 A	10 A	10 A	
Approvals per		UL 1059		
Use group		B	C	D
Rated voltage		300 V	50 V	-
Rated current		10 A	10 A	-
Approvals per		CSA		
Use group	B	C	D	
Rated voltage	300 V	-	-	
Rated current	10 A	-	-	

Connection data		
Clamping units	36	
Total number of potentials	36	
Number of connection types	1	
Number of levels	2	
Connection 1		
Connection technology	CAGE CLAMP®	
Actuation type	Operating tool	
Actuation direction 1	Operation perpendicular to conductor entry	
Solid conductor	0.08 ... 1.5 mm² / 28 ... 16 AWG	
Fine-stranded conductor	0.08 ... 1.5 mm² / 28 ... 16 AWG	
Fine-stranded conductor; with insulated ferrule	0.25 ... 1 mm²	
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 1 mm²	
Strip length	6 ... 7 mm / 0.24 ... 0.28 inches	
Pole number	36	
Conductor entry direction to mating direction	0°	

Physical data	
Pin spacing	3.5 mm / 0.138 inches
Width	71.5 mm / 2.815 inches
Height	18.8 mm / 0.74 inches
Depth	16 mm / 0.63 inches



Mechanical data		
Variable coding		Yes
Anti-rotation protection		Yes
Plug-in connection		
Contact type (pluggable connector)		Female connector/socket
Connector (connection type)		for conductor
Mismating protection		Yes
Locking of plug-in connection		Locking lever
Material data		
Note (material data)		Information on material specifications can be found here
Color		black
Material group		II
Insulation material (main housing)		Glass fiber-reinforced polyamide (PA66 GF)
Flammability class per UL94		V0
Clamping spring material		Chrome-nickel spring steel (CrNi)
Contact material		Copper alloy
Contact Plating		Tin
Fire load		0.264 MJ
Weight		19 g
Environmental requirements		
Limit temperature range		-60 ... +100 °C
Processing temperature		-35 ... +60 °C
Commercial data		
Product Group		3 (Multi Conn. System)
eCl@ss 10.0		27-14-11-06
eCl@ss 9.0		27-14-11-06
ETIM 9.0		EC001284
ETIM 8.0		EC001284
PU (SPU)		10 pcs
Packaging type		Box
Country of origin		PL
GTIN		4050821177333
Customs tariff number		85366990990
Environmental Product Compliance		
REACH Candidate List Substance		Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status		Compliant, No Exemption
SCIP notification number (Austria)		931921ae-c9b2-4809-beef-5217da760a9d
SCIP notification number (Belgium)		144c9724-032a-4bf0-aa61-ff47196ca803
SCIP notification number (Bulgaria)		5f1a598a-e146-44d8-bc8b-064b126f5148
SCIP notification number (Czech Republic)		e362835e-f63b-4b53-85bf-4ff972a02b0f
SCIP notification number (Denmark)		8de1e6cb-9e99-4987-95c2-a42e8cd1fa2e
SCIP notification number (Finland)		24ddb777-b43e-4bdd-a987-dacb57cc0d0d
SCIP notification number (France)		628aaf47-fc08-4764-bf29-bbe3552e94ad
SCIP notification number (Germany)		128418b7-52ac-4a92-b1d5-f5965680875e
SCIP notification number (Hungary)		45fbdda0-f080-40b9-877a-9fd262ed3f14
SCIP notification number (Italy)		f9489fa8-67eb-4a7e-b443-450e2ad95881
SCIP notification number (Netherlands)		523878a5-1d30-4583-9079-c2e17dfbfe66



Environmental Product Compliance	
SCIP notification number (Poland)	481fbf8c-da96-46d4-8cb8-bd593023024b
SCIP notification number (Romania)	9d41540d-c8c4-42d8-ad78-7a0bf203ccb7
SCIP notification number (Sweden)	b403a8ea-4b07-4a13-ba48-b987e5ab6c29

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
  		
Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-102427
CSA CSA Group	C22.2	2315087
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-133740
UL Underwriters Laboratories Inc.	UL 1059	UL-US-L45172-6187124-22905991-1
Approval	Standard	Certificate Name
Railway WAGO GmbH & Co. KG	-	Z00004423.000

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 713-1118/037-9037	

Documentation			
Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	

1 Compatible Products		
1.1 System counterpart		
1.1.1 Male connector/plug		
		
Item No.: 713-1498/037-000 Panel feedthrough male connector; 100% protected against mismatching; 36-pole; Pin spacing 3.5 mm; black	Item No.: 713-1438/037-000 THT male header, 2-row; 0.8 x 0.8 mm solder pin; angled; 100% protected against mismatching; Levers; Pin spacing 3.5 mm; 36-pole; black	Item No.: 713-1418/037-000 THT male header, 2-row; 0.8 x 0.8 mm solder pin; straight; 100% protected against mismatching; Levers; Pin spacing 3.5 mm; 36-pole; black



1.2 Optional Accessories

1.2.1 Ferrule

1.2.1.1 Ferrule

 Item No.: 216-301 Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow	 Item No.: 216-321 Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow	 Item No.: 216-131 Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated; silver-colored	 Item No.: 216-302 Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise
 Item No.: 216-322 Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise	 Item No.: 216-132 Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated	 Item No.: 216-201 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; acc. to DIN 46228, Part 4/09.90; white	 Item No.: 216-241 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white
 Item No.: 216-221 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white	 Item No.: 216-141 Ferrule; Sleeve for 0.5 mm² / 20 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92	 Item No.: 216-101 Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated; silver-colored	 Item No.: 216-121 Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated; silver-colored
 Item No.: 216-242 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray	 Item No.: 216-262 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray	 Item No.: 216-202 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray	 Item No.: 216-222 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray
 Item No.: 216-142 Ferrule; Sleeve for 0.75 mm² / 18 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92	 Item No.: 216-102 Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated; silver-colored	 Item No.: 216-122 Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated; silver-colored	 Item No.: 216-243 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red
 Item No.: 216-263 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red	 Item No.: 216-203 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red	 Item No.: 216-223 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red	 Item No.: 216-103 Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated
 Item No.: 216-143 Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92	 Item No.: 216-123 Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; silver-colored		

1.2.2 Stickers with operating instructions

1.2.2.1 Stickers with operating instructions



Item No.: 210-493
Stickers for operating instructions

1.2.3 Strain relief

1.2.3.1 Strain relief plate



Item No.: 713-129
Strain relief plate; for female connectors;
53 mm wide; 1 part; Pin spacing 3.5 mm;
black

1.2.4 Tool

1.2.4.1 Operating tool




Item No.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a
partially insulated shaft



Item No.: 210-647
Operating tool; Blade: 2.5 x 0.4 mm; with a
partially insulated shaft; multicoloured


Installation Notes

Conductor termination




Inserting a conductor via (2.5 x 0.4) mm
screwdriver.


Locking system



Lever as a lock – when closed, female
connector is locked.




Lever as a disconnection aid – when ope-
ned, female connector is disconnected.
Rotating the lever lifts the female
connector out of the male header.



Screw interlock can only be disconnected
using a tool.

Coding




Coding a female connector by removing
coding finger(s).

Strain relief



Strain relief plate for field assembly



Centered strain relief plate anchors conductors for easy disconnection.