

Product data sheet Spirotech

Product name

Article number

SpiroVent RV2 -22mm -Uni

UA022W

Product properties


Product image

A brass (microbubble) deaerator with a 22 mm - 2" universal connection

- Removes all circulating air and micro bubbles effectively
- Removes trapped air when installed at the correct location
- Greatly reduces the need for manual venting
- Applicable with 50/50 Glycol / Water (Volume)
- Constant low-pressure drop
- No unnecessary shutdown
- Connection diameters from 22 mm to 2" (G2)
- Exceptional guarantee



Product dimensions

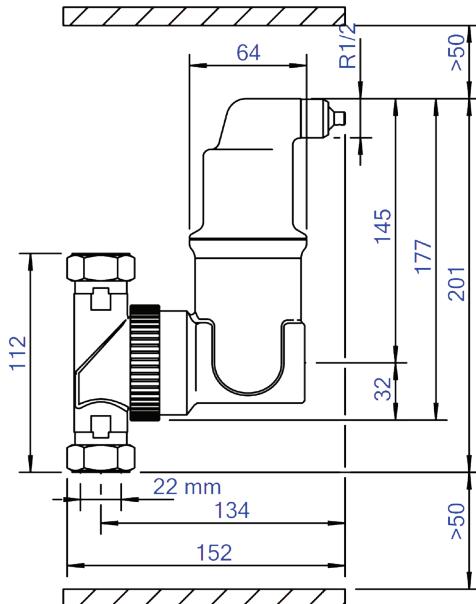

Product data sheet Spirotech

ETIM product data

Housing material	Brass	Construction length	120 mm
With drain valve	No	Article compression class	PN 10
Housing material quality	Other	Surface protection	Untreated
Backwash filter	No	Suitable for open system	No
Medium temperature (continuous)	0 - 110 °C	Suitable for closed system	Yes
Max. operating pressure	10 bar	Suitable for solar	No
KVS value [m ³ /h] at ΔP 1 bar	9.07	With dismountable filter	No
Variable flow direction	Yes	Filter volume	0.18 l
With insulation	No	Magnet operating principle	No
Separator type	Air	With automatic de-aerator	Yes
Connection	Compression ring	With integrated replenishment automat	No
Model	Horizontal/vertical	With couplers	Yes
Nominal diameter	Other	Material of connection	Brass
Max. glycol mixture	50 %	Inlet/outlet offset distance	0 mm
Suitable for heating	Yes	Material quality connection	Other
Suitable for cooling	Yes	Flow-through capacity	0 - 1.3 m ³ /h
Outer pipe diameter	22 mm	Operating principle	Other

Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website

