

Product data sheet Spirotech

Product name

SpiroVent RV2 -1½" -Uni

Article number

UA150W

Product properties


Product image

A brass (microbubble) deaerator with a 22 mm - 2" universal connection

- Removes all circulating air and micro bubbles effectively
- Removes trapped air when installed at the correct location
- Greatly reduces the need for manual venting
- Applicable with 50/50 Glycol / Water (Volume)
- Constant low-pressure drop
- No unnecessary shutdown
- Connection diameters from 22 mm to 2" (G2)
- Exceptional guarantee



Product dimensions

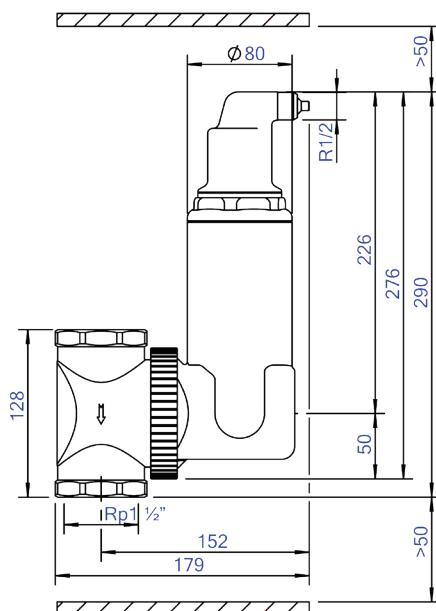

Product data sheet Spirotech

ETIM product data

Housing material	Brass	Article compression class	PN 10
With drain valve	No	Surface protection	Untreated
Housing material quality	Other	Suitable for open system	No
Backwash filter	No	Suitable for closed system	Yes
Medium temperature (continuous)	0 - 110 °C	Suitable for solar	No
Max. operating pressure	10 bar	With dismountable filter	No
KVS value [m ³ /h] at ΔP 1 bar	24.9	Filter volume	1.16 l
Variable flow direction	Yes	Magnet operating principle	No
With insulation	No	With automatic de-aerator	Yes
Separator type	Air	With integrated replenishment automat	No
Connection	Internal thread cylindrical BSPT-Rp (ISO 7-1 / EN 10226-1)	With couplers	No
Model	Horizontal/vertical	Material of connection	Brass
Nominal diameter	1 1/2 inch (40)	Inlet/outlet offset distance	0 mm
Max. glycol mixture	50 %	Material quality connection	Other
Suitable for heating	Yes	Flow-through capacity	0 - 5 m ³ /h
Suitable for cooling	Yes	Operating principle	Other
Construction length	276 mm		

Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website

