



Features

- 400mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with PMMA prismatic diffuser. Direct light distribution, 1935lm luminous flux, 15.9W system power, 122lm/W luminaire efficacy. Sylsmart Standalone enabled. Colour rendering index Ra >80, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 350mA drive current. UGR≤19. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.

Product Overview


Product name	COLOSSAL 400mm 840 PRISM DIR WHITE SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
Fixture luminous flux (lm)	1935
Luminaire efficacy (lm/W)	122
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	15.9
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07

Concord


COLOSSAL 400mm 840 PRISM DIR WHITE SSC 2071120

Product EAN number	5025768711208
Warranty	5 years
Colour Code	840

Photometry

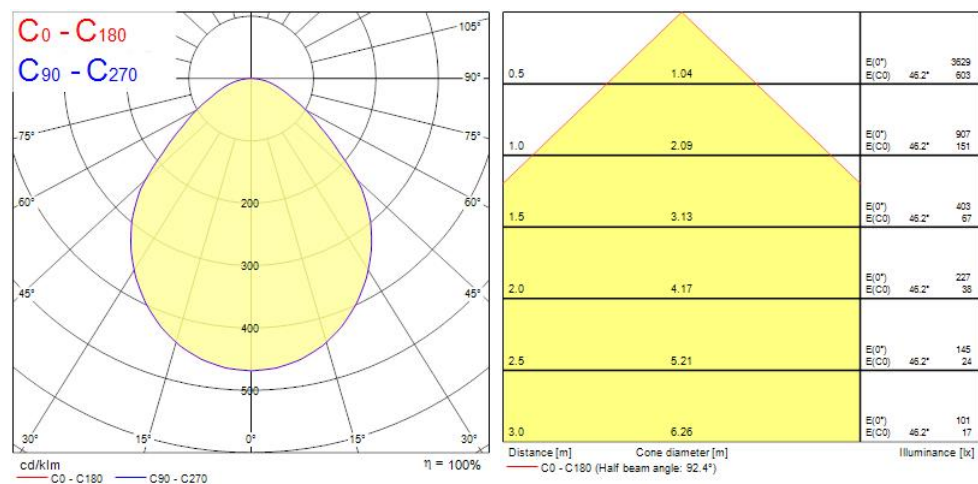

Technical drawings

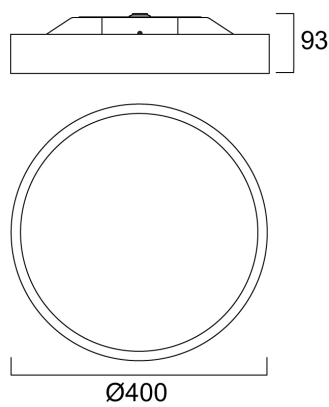

Data table

COLOSSAL 400mm 840 PRISM DIR WHITE SSC 2071120

GENERAL DATA

Product name	COLOSSAL 400mm 840 PRISM DIR WHITE SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1935
Luminaire efficacy (lm/W)	122
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	15.9
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	350
Inrush Current (A)	20
Inrush Duration (µs)	25
Glow Wire Test (°C)	650

Concord

COLOSSAL 400mm 840 PRISM DIR WHITE SSC 2071120

Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	57
Max. products per 20A B Breaker	68
Connectable conductor cross section - Min (mm²)	1.5
Connectable conductor cross section - Max (mm²)	1.5

LIFETIME DATA

Lifespan L70 B50	170000
Lifespan L80 B20	145000
Lifespan L90 B10	66000

PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PMMA Acrylic
Nominal Product Diameter (mm)	400
Weight (kg)	6.5

PACKAGING

Single packaging type	Carton
Product EAN number	5025768711208
Packaging single width (cm)	47.0
Packaging single depth (cm)	47.0
DUN14 (outer)	05025768711208
Packaging outer length / height (cm)	14.0

SAFETY DATA

Concord

COLOSSAL 400mm 840 PRISM DIR WHITE SSC
2071120

Optimal operating condition (°C)	10-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No