



Features

- Logistics and Industry high bay luminaire with Symmetrical Wide beam optics to provide homogenous light distribution for open space areas, comes complete with 2000mm flying lead and 1000mm suspension cable, aluminium housing, PC diffuser, IP65, IK08, Class I, 4000K, CRI80, 3 step MacAdam ellipse, Zhaga Book 18 Ready, 13500lm, 72W, 188lm/W, 105.000hrs L80B50 lifespan, 446 x 481 x 96mm (LxWxD) dimensions, 4.72kg weight, RAL7012 Basalt Grey color, -30...+50°C operating temperature range.

Product Overview


| | |
|-----------------------------------|-------------------------------|
| Product name | Rocks IP65 13KLM 840 WIDE Z18 |
| Technology | LED (3 SDCM) |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Suspended |
| General application | Logistics & Industry |
| ETIM Class | EC001716 |
| E-number FI | 4327156 |
| Fixture luminous flux (lm) | 13500 |
| Luminaire efficacy (lm/W) | 188 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 3 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 75 |
| Glare control | < 19 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 72 |

Concord

**Rocks IP65 13KLM 840 WIDE Z18
2825416**

| | |
|-----------------------|-----------------------------|
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Housing colour | Grey |
| IP rating | IP65 |
| IK rating | IK08 |
| Product EAN number | 5025768254163 |
| Warranty | 5 years |
| Dimming method | DALI-2 |

Photometry

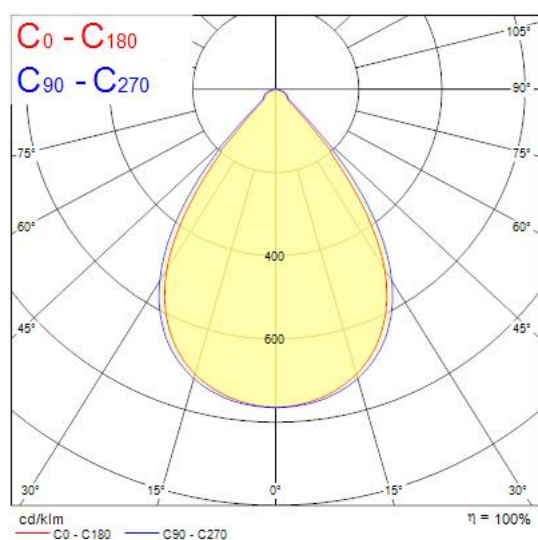

Technical drawings

