


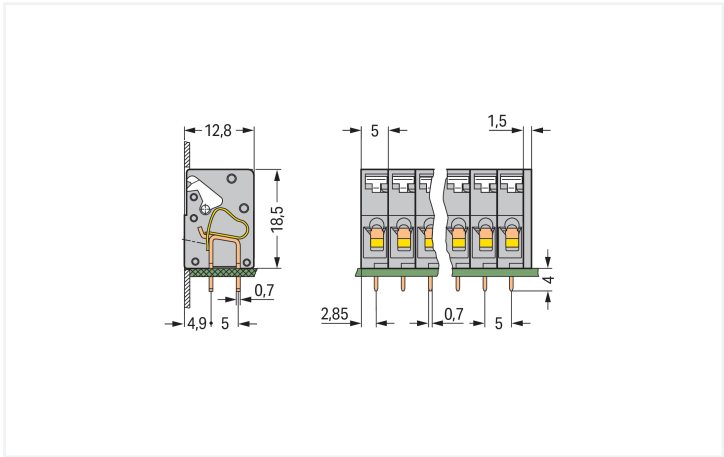

Color: ■ gray

Similar to illustration

Dimensions in mm  
Total length = (pole no. x pin spacing) + 1.5 mm

Feedthrough terminal block, 741 Series, solder pin dimensions 0.7 x 0.7 mm

Our feedthrough terminal block (item number 741-109) simplifies electrical installations. Conductors can only be connected to feedthrough terminal block if their strip length is between 5 and 6 mm . This product features one conductor terminal and utilizes CAGE CLAMP®. Our CAGE CLAMP® connection provides a safe and maintenance-free way to connect all types of conductors. You do not need to prepare the conductor in any way, such as crimping ferrules. The dimensions are (46.5 x 22.5 x 12.8) mm (width x height x depth). Feedthrough terminal block is suitable for conductor cross sections ranging from 0.08 mm² to 2.5 mm².

The contact surface is coated with tin. THT is used to solder the feedthrough terminal block.

| Notes     |                                                                                                                                                                                                                      |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Variants: | Other pole numbers<br>Other colors<br>Direct marking<br>Other versions (or variants) can be requested from WAGO Sales or configured at <a href="https://configurator.wago.com/">https://configurator.wago.com/</a> . |

| Electrical data                 |  |                |       |       |
|---------------------------------|--|----------------|-------|-------|
| Ratings per                     |  | IEC/EN 60664-1 |       |       |
| Overvoltage category            |  | III            | III   | II    |
| Pollution degree                |  | 3              | 2     | 2     |
| Nominal voltage                 |  | 250 V          | 320 V | 630 V |
| Rated impulse withstand voltage |  | 4 kV           | 4 kV  | 4 kV  |
| Rated current                   |  | 16 A           | 16 A  | 16 A  |
| Approvals per                   |  | CSA            |       |       |
| Use group                       |  | B              | C     | D     |
| Rated voltage                   |  | 300 V          | -     | 300 V |
| Rated current                   |  | 16 A           | -     | 10 A  |

| Approvals per |  | UL 1059 |   |       |
|---------------|--|---------|---|-------|
| Use group     |  | B       | C | D     |
| Rated voltage |  | 300 V   | - | 300 V |
| Rated current |  | 10 A    | - | 10 A  |

|                         |                          |
|-------------------------|--------------------------|
| Pin spacing             | 5 mm / 0.197 inches      |
| Width                   | 46.5 mm / 1.831 inches   |
| Height                  | 22.5 mm / 0.886 inches   |
| Height from the surface | 18.5 mm / 0.728 inches   |
| Depth                   | 12.8 mm / 0.504 inches   |
| Solder pin length       | 4 mm                     |
| Solder pin dimensions   | 0.7 x 0.7 mm             |
| !                       | 1.1 <sup>(+0.1)</sup> mm |

|                                     |                                          |
|-------------------------------------|------------------------------------------|
| PCB contact                         | THT                                      |
| Solder pin arrangement              | over the entire terminal strip (in-line) |
| Number of solder pins per potential | 2                                        |

|                                    |                                                                          |
|------------------------------------|--------------------------------------------------------------------------|
| Note (material data)               | <a href="#">Information on material specifications can be found here</a> |
| Color                              | gray                                                                     |
| Material group                     | I                                                                        |
| Insulation material (main housing) | Polyamide (PA66)                                                         |
| Flammability class per UL94        | V0                                                                       |
| Clamping spring material           | Chrome-nickel spring steel (CrNi)                                        |
| Contact material                   | Electrolytic copper (E <sub>Cu</sub> )                                   |
| Contact Plating                    | Tin                                                                      |
| Fire load                          | 0.243 MJ                                                                 |
| Weight                             | 11.8 g                                                                   |

|                         |                 |
|-------------------------|-----------------|
| Limit temperature range | -60 ... +105 °C |
|-------------------------|-----------------|



| Commercial data       |                                |
|-----------------------|--------------------------------|
| Product Group         | 4 (Printed Circuit Connectors) |
| PU (SPU)              | 100 (25) pcs                   |
| Packaging type        | Box                            |
| Country of origin     | CH                             |
| GTIN                  | 4044918679657                  |
| Customs tariff number | 85369010000                    |

| Product Classification |                      |
|------------------------|----------------------|
| UNSPSC                 | 39121409             |
| eCl@ss 10.0            | 27-44-04-01          |
| eCl@ss 9.0             | 27-44-04-01          |
| ETIM 9.0               | EC002643             |
| ETIM 10.0              | EC002643             |
| ECCN                   | NO US CLASSIFICATION |

| Environmental Product Compliance |                         |
|----------------------------------|-------------------------|
| RoHS Compliance Status           | Compliant, No Exemption |

Approvals / Certificates

| General approvals                                                                  |               | Declarations of conformity and manufacturer's declarations                                                                                                                                                                                                                                |          |          |                  |                                                         |   |   |                                                         |   |   |
|------------------------------------------------------------------------------------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|------------------|---------------------------------------------------------|---|---|---------------------------------------------------------|---|---|
|  |               |                                                                                                                                                                                                                                                                                           |          |          |                  |                                                         |   |   |                                                         |   |   |
| Approval                                                                           | Standard      | Certificate Name                                                                                                                                                                                                                                                                          |          |          |                  |                                                         |   |   |                                                         |   |   |
| CCA<br>DEKRA Certification B.V.                                                    | EN 60947      | 2160584.21                                                                                                                                                                                                                                                                                |          |          |                  |                                                         |   |   |                                                         |   |   |
| CCA<br>DEKRA Certification B.V.                                                    | EN 60947      | NTR NL-7104                                                                                                                                                                                                                                                                               |          |          |                  |                                                         |   |   |                                                         |   |   |
| CCA<br>DEKRA Certification B.V.                                                    | EN 60998      | 2166926.01                                                                                                                                                                                                                                                                                |          |          |                  |                                                         |   |   |                                                         |   |   |
| CCA<br>DEKRA Certification B.V.                                                    | EN 60998      | NTR NL-7187                                                                                                                                                                                                                                                                               |          |          |                  |                                                         |   |   |                                                         |   |   |
| CSA<br>DEKRA Certification B.V.                                                    | C22.2 No. 158 | 1711139                                                                                                                                                                                                                                                                                   |          |          |                  |                                                         |   |   |                                                         |   |   |
| UR<br>Underwriters Laboratories Inc.                                               | UL 1059       | E45172                                                                                                                                                                                                                                                                                    |          |          |                  |                                                         |   |   |                                                         |   |   |
|                                                                                    |               | <table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>EU-Declaration of Confor-<br/>mity<br/>WAGO GmbH &amp; Co. KG</td><td>-</td><td>-</td></tr><tr><td>UK-Declaration of Confor-<br/>mity<br/>WAGO GmbH &amp; Co. KG</td><td>-</td><td>-</td></tr></table> | Approval | Standard | Certificate Name | EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | - | - | UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | - | - |
| Approval                                                                           | Standard      | Certificate Name                                                                                                                                                                                                                                                                          |          |          |                  |                                                         |   |   |                                                         |   |   |
| EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG                            | -             | -                                                                                                                                                                                                                                                                                         |          |          |                  |                                                         |   |   |                                                         |   |   |
| UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG                            | -             | -                                                                                                                                                                                                                                                                                         |          |          |                  |                                                         |   |   |                                                         |   |   |

Approvals for marine applications

|  |           |                   |
|------------------------------------------------------------------------------------|-----------|-------------------|
| Approval                                                                           | Standard  | Certificate Name  |
| ABS<br>American Bureau of Ship-<br>ping                                            | -         | 24-0095975-PDA    |
| BV<br>Bureau Veritas S.A.                                                          | IEC 60998 | 11915/E0 BV       |
| DNV<br>DNV GL SE                                                                   | -         | TAE000016Z        |
| PRS<br>Polski Rejestr Statków                                                      | -         | TE/1095/880590/23 |

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 741-109

↓

Documentation

Additional Information

Technical Section

03.04.2019

pdf

2027.26 KB

↓

CAD/CAE-Data

CAD data

2D/3D Models 741-109

↓

CAE data

EPLAN Data Portal 741-109

↓

ZUKEN Portal 741-109

↓

PCB Design

Symbol and Footprint via SamacSys 741-109

↓

Symbol and Footprint via Ultra Librarian 741-109

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule

|                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <div><a href="#">Item No.: 216-301</a><br/>Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow</div>                                                     |  <div><a href="#">Item No.: 216-321</a><br/>Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow</div>                                                                       |  <div><a href="#">Item No.: 216-151</a><br/>Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated</div>     |  <div><a href="#">Item No.: 216-131</a><br/>Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated; silver-colored</div>                                                        |
|  <div><a href="#">Item No.: 216-302</a><br/>Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise</div>                                            |  <div><a href="#">Item No.: 216-322</a><br/>Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise</div>                                                              |  <div><a href="#">Item No.: 216-132</a><br/>Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated</div>     |  <div><a href="#">Item No.: 216-152</a><br/>Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated</div>                                                                        |
|  <div><a href="#">Item No.: 216-201</a><br/>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; acc. to DIN 46228, Part 4/09.90; white</div> |  <div><a href="#">Item No.: 216-241</a><br/>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white</div> |  <div><a href="#">Item No.: 216-221</a><br/>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white</div> |  <div><a href="#">Item No.: 216-141</a><br/>Ferrule; Sleeve for 0.5 mm² / 20 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92</div> |



1.1.1.1 Ferrule

|                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 216-101</b><br>Ferrule; Sleeve for 0.5 mm² / AWG 22; un-insulated; electro-tin plated; silver-colored                                                               | <br><b>Item No.: 216-121</b><br>Ferrule; Sleeve for 0.5 mm² / AWG 22; un-insulated; electro-tin plated; silver-colored                                                         | <br><b>Item No.: 216-242</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray               | <br><b>Item No.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray  |
| <br><b>Item No.: 216-202</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray                                                                           | <br><b>Item No.: 216-222</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray                                                                     | <br><b>Item No.: 216-142</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92                  | <br><b>Item No.: 216-102</b><br>Ferrule; Sleeve for 0.75 mm² / AWG 20; un-insulated; electro-tin plated; silver-colored                                                             |
| <br><b>Item No.: 216-122</b><br>Ferrule; Sleeve for 0.75 mm² / AWG 20; un-insulated; electro-tin plated; silver-colored                                                              | <br><b>Item No.: 216-243</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red | <br><b>Item No.: 216-263</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red                   | <br><b>Item No.: 216-203</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red                                                                              |
| <br><b>Item No.: 216-223</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red                                                                               | <br><b>Item No.: 216-103</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; un-insulated; electro-tin plated                                                                           | <br><b>Item No.: 216-143</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92                     | <br><b>Item No.: 216-123</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; un-insulated; electro-tin plated; silver-colored                                                                |
| <br><b>Item No.: 216-204</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black                                                                          | <br><b>Item No.: 216-224</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black                                                                    | <br><b>Item No.: 216-244</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black              | <br><b>Item No.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black |
| <br><b>Item No.: 216-284</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | <br><b>Item No.: 216-124</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; un-insulated; electro-tin plated                                                                       | <br><b>Item No.: 216-144</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92; silver-colored | <br><b>Item No.: 216-104</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; un-insulated; electro-tin plated; silver-colored                                                            |

1.1.2 Marking

1.1.2.1 Marking strip

|                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 210-332/500-202</b><br>Marking strips; as a DIN A4 sheet; MARKED; 1-16 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white | <br><b>Item No.: 210-332/500-205</b><br>Marking strips; as a DIN A4 sheet; MARKED; 1-32 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white | <br><b>Item No.: 210-332/500-204</b><br>Marking strips; as a DIN A4 sheet; MARKED; 17-32 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white | <br><b>Item No.: 210-332/500-206</b><br>Marking strips; as a DIN A4 sheet; MARKED; 33-48 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



1.1.3 Tool

1.1.3.1 Operating tool



Item No.: 210-720  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Item No.: 210-657  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short; multicoloured