




Color: ■ black

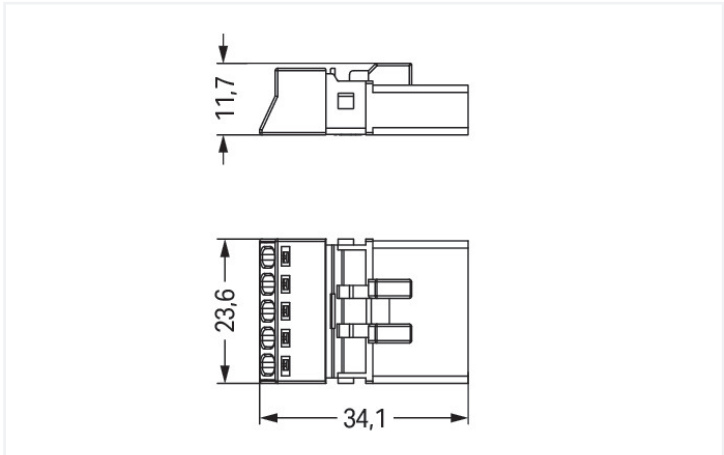

Dimensions in mm

Male connector/plug WINSTA® MINI 5-pole

The WINSTA® MINI male connector/plug A coding supports fast, reliable installation. The pluggable installation connectors with spring pressure connection technology function entirely without screw connections. They allow fast, efficient, error-free installation in a large number of applications. The mechanical coding and color coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. Thanks to the color coding and mechanical A coding of WINSTA® MINI pluggable installation connectors, you can clearly distinguish different circuits. If only limited space is available, our smallest pluggable connection system, WINSTA® MINI, consistently displays its strengths. It is very compact, and, thanks to Push-in CAGE CLAMP® spring pressure connection technology, it also can be installed quickly, since the connection is low-maintenance and requires no screw connections.

Lower costs through fast commissioning and elimination of service expenses – solutions from WINSTA® MINI

The WINSTA® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and thus more efficient, even more reliable, and error-free. Use of this pre-assembled system decreases assembly times and installation errors at the construction site. Choose quality and durability – with marking from WAGO makes the electrical installation of electrical components visibly easier.

- protection against mismatching eliminates errors
- compact design for conductors with a cross-section up to 1.5 mm²
- with A coding for a large number of uses
- flexible installation to save space
- quick replacement of defective units during ongoing operation

Notes	
General safety information	NOTICE: Observe installation and safety instructions! • Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105-100) anzuwenden! • Nicht unter Spannung/Last installieren! • Nur für bestimmungsgemäßen Gebrauch einsetzen! • Nationale Vorschriften/Normen/Richtlinien beachten! • Technische Daten der Produkte beachten! • Auf die richtige Polbelegung achten! • Keine beschädigten/verschmutzten Komponenten verwenden! • Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten! • Leiter bis zum Anschlag einführen! • Nur mit Verriegelungsklinke und Zugentlastung verwenden! • Originalzubehör verwenden! To be sold only with installation instructions!



Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category	III	III	II	
Pollution degree	3	2	2	
Nominal voltage	400 V	-	-	
Rated impulse withstand voltage	6 kV	-	-	
Rated current	13 A	-	-	
Approvals per				
Rated voltage		600 V		
Rated current		12 A		
General information				
Note on contact resistance		approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket		

Connection Data				
Clamping units		5		
Total number of potentials		5		
Connection 1				
Connection technology		Push-in CAGE CLAMP®		
Actuation type		Operating tool Push-in		
Nominal cross-section		1.5 mm² / 16 AWG		
Solid conductor		0.25 ... 1.5 mm² / 22 ... 16 AWG		
Solid conductor; push-in termination		0.75 ... 1.5 mm² / 20 ... 16 AWG		
Stranded conductor		0.25 ... 1 mm² / 22 ... 18 AWG		
Fine-stranded conductor		0.25 ... 1.5 mm² / 22 ... 16 AWG		
Fine-stranded conductor; with insulated ferrule		0.25 ... 0.75 mm² / 22 ... 20 AWG		
Fine-stranded conductor; with uninsulated ferrule		0.25 ... 0.75 mm² / 22 ... 20 AWG		
Fine-stranded conductor; with ferrule; push-in termination		0.75 mm² / 20 AWG		
Strip length		9 mm / 0.35 inches		
Pole number		5		
Conductor entry direction to mating direction		0 °		

Physical data	
Pin spacing	4.4 mm / 0.173 inches
Width	23.6 mm / 0.929 inches
Height	11.7 mm / 0.461 inches
Depth	34.1 mm / 1.343 inches

Mechanical data	
Use	General mains applications
Coding	A
Variable coding	Yes
Marking	3 2 1 ⊕ N
Potential marking	3 2 1 ⊕ N
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection	Locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Protection type	IP20; IP40 when mated with strain relief housing

Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Can be retrofitted
Locking of plug-in connection	Locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

Material data

Note (material data)	Information on material specifications can be found here
Color	black
Cover color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact Plating	Tin
Fire load	0.121 MJ
Weight	5.6 g

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Product Group	20 (Winsta)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	PL
GTIN	4055143548595
Customs tariff number	85366990990

Product Classification

UNSPSC	39121402
eCl@ss 10.0	27-44-06-05
eCl@ss 9.0	27-44-06-05
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION



Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
 					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61535	71-123231	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	IEC 61535	NL-85020	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
cURus Underwriters Laboratories Inc.	UL 1977	E45171			

Approvals for marine applications

   					
Approval	Standard	Certificate Name			
ABS American Bureau of Ship- ping	Steel Vessel Rules	24-0095973-PDA			
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001Z6			
LR Lloyds Register	EN 61535	LR23317167TA			
PRS Polski Rejestr Statków	-	TE/1096/880590/23			

Downloads

Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 890-215	

Documentation

Bid Text			
890-215	19.02.2019	xml 2.93 KB	
890-215	08.06.2015	doc 23.00 KB	



CAD/CAE-Data	
CAD data 2D/3D Models 890-215 ↓	CAE data WSCAD Universe 890-215 ↓
	ZUKEN Portal 890-215 ↓

1 Compatible Products

1.1 System counterpart

1.1.1 Cable assembly



Item No.: 891-8995/106-101
pre-assembled connecting cable; Eca; Socket/open-ended; 5-pole; Cod. A; H05VV-F 5G 1.5 mm²; 1 m; 1,50 mm²; black



Item No.: 891-8995/006-101
pre-assembled interconnecting cable; Eca; Socket/plug; 5-pole; Cod. A; H05VV-F 5G 1.5 mm²; 1 m; 1,50 mm²; black

1.1.2 Distribution connector



Item No.: 890-929
h-distribution connector; 5-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 2 locking levers; black



Item No.: 890-930
h-distribution connector; 5-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 3 locking levers; for flying leads; black



Item No.: 890-621
T-distribution connector; 5-pole; Cod. A; 1 input; 2 outputs; 2 locking levers; black



Item No.: 890-622
T-distribution connector; 5-pole; Cod. A; 1 input; 2 outputs; 3 locking levers; for flying leads; black

1.1.3 Female connector/socket



Item No.: 890-705
Snap-in socket; 5-pole; Cod. A; 1,50 mm²; black



Item No.: 890-705/006-000
Snap-in socket; without locking lever; 5-pole; Cod. A; 1,50 mm²; black



Item No.: 890-805/011-000
Socket for PCBs; angled; 5-pole; Cod. A; black



Item No.: 890-805
Socket for PCBs; straight; 5-pole; Cod. A; black



Item No.: 890-205
Socket; 5-pole; Cod. A; 1,50 mm²; black



Item No.: 890-105
Socket; with strain relief housing; 5-pole; Cod. A; 1,50 mm²; black

1.2 Required Accessories

1.2.1 Locking system

1.2.1.1 Locking system



Item No.: 890-111
Locking lever; for flying leads; for tool operation; black



Item No.: 890-131
Locking lever; for flying leads; for tool operation; white



Item No.: 890-101
Locking lever; for manual operation; black



Item No.: 890-121
Locking lever; for manual operation; white



1.2.2 Strain relief

1.2.2.1 Strain relief housing



Item No.: 890-505
Strain relief housing; 5-pole; with locking clip; for 1 cable; 6.5 ... 10.5 mm; 45 mm; black



Item No.: 890-515
Strain relief housing; 5-pole; with locking clip; for 1 cable; 6.5 ... 10.5 mm; 45 mm; white

1.3 Optional Accessories

1.3.1 Cover

1.3.1.1 Cover



Item No.: 897-2003
Protective cap; Type2; for sockets and plugs; PVC; red

1.3.2 Installation

1.3.2.1 Mounting accessories



Item No.: 890-310
Mounting carrier; 2- to 5-pole; for flying leads; black



Item No.: 890-311
Mounting carrier; 2- to 5-pole; for flying leads; white

1.3.3 Shield termination

1.3.3.1 Shield termination



Item No.: 890-527
Shield connecting plate; 5-pole; for plugs

1.3.4 Tool

1.3.4.1 Operating tool







Item No.: 890-385
Operating tool; 5-way; green



Item No.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

Installation Notes

Conductor termination





1. Strip length, outer insulation = 30 mm (2-pole), 37 mm (3-pole), 45 mm (4- and 5-pole)
2. Strip length = 9 mm
3. Extended ground conductor = 8 mm

To terminate fine-stranded conductors, open the clamping unit via screwdriver – 2.5 mm blade width – and insert a stripped conductor until it hits the backstop. Terminate solid conductors by simply pushing them in.

To terminate fine-stranded conductors, open clamping units via operating tool (890-382) and insert stripped conductors until they hit backstop. Terminate solid conductors by simply pushing them in.

To terminate fine-stranded conductors, open clamping units via operating tool (890-383) and insert stripped conductors until they hit backstop. Terminate solid conductors by simply pushing them in.

Installation



Latch the wired connector into the base of the strain relief housing.

Push down strain relief clamp by hand.


Push down strain relief clamp with 2.5 mm screwdriver alternately on both sides.

Latch the top of the strain relief housing.



The printed marking of the connector is clearly visible in the openings of the strain relief housing.

Shield termination



Connector with shield termination

Apply the shield to the sheathed cable.
Strip length, outer insulation = 30 mm
Shield length = 8 mm

Push the shield connecting plate into the connector until fully inserted.

First insert the wired connector into strain relief housing, then snap clamp and cover.