

### Features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 1000 lm, 9.5 W, 105 lm/W, 4000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 90000 hrs, 100 x 108 x 23 mm (L x W x H). Weight: 0.26 kg.

### Product Overview

Product name	Start Flood IP65 1000LM 840 Black
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted, Ceiling surface mounting
Fixture luminous flux (lm)	1000
Luminaire efficacy (lm/W)	105
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG1
Total power consumption (W)	9.5
Electrical protection	Class I
Control gear type	Not required
Housing colour	Black
IP rating	IP65
IK rating	IK06

## Start Flood IP65 1000LM 840 Black 0050161


Product EAN number

5410288501611

Warranty

3 years

### Photometry

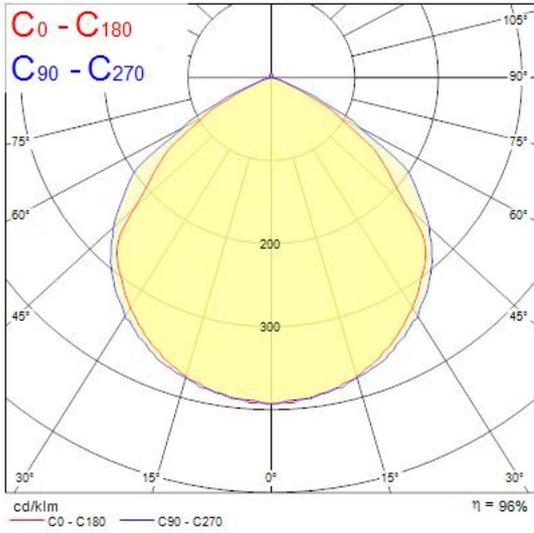

### Technical drawings

