

### Features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 5000 lm, 42 W, 119 lm/W, 4000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 120000 hrs, 122 x 156 x 28 mm (L x W x H). Weight: 0.445 kg.

### Product Overview

Product name	Start Flood IP65 5000LM 840 Black
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Wall surface mounted
Fixture luminous flux (lm)	5000
Luminaire efficacy (lm/W)	119
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG1
Total power consumption (W)	42
Electrical protection	Class I
Control gear type	Not required
Housing colour	Black
IP rating	IP65
IK rating	IK06

## Start Flood IP65 5000LM 840 Black 0050165


Product EAN number

5410288501659


Warranty

3 years

### Photometry

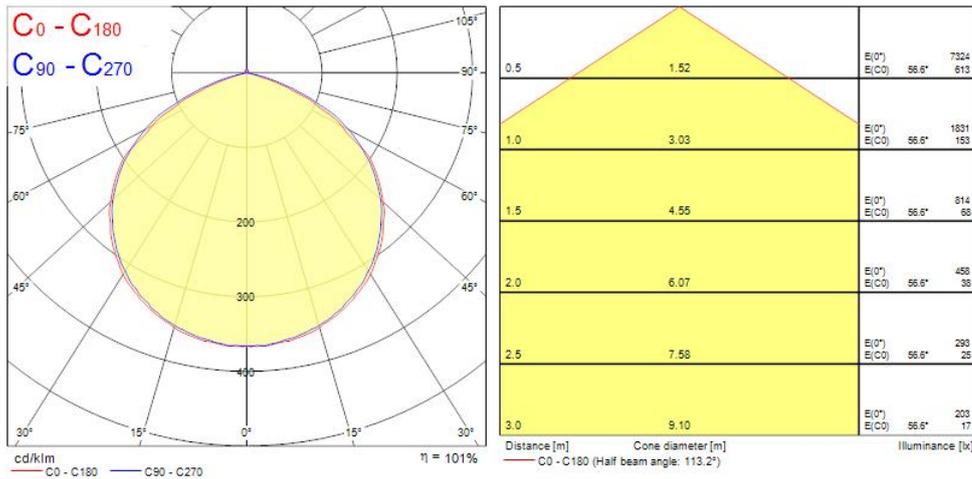

### Technical drawings

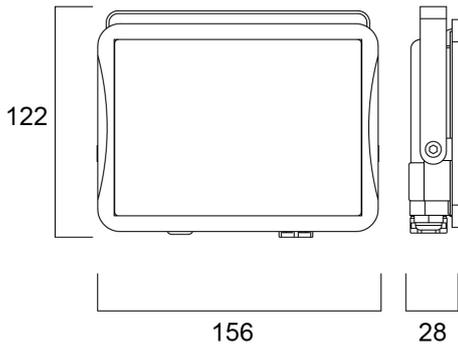

### Data table

## Start Flood IP65 5000LM 840 Black 0050165

### GENERAL DATA

Product name	Start Flood IP65 5000LM 840 Black
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Wall surface mounted
Operating temperature range (°C)	-20°C...+40°C
Warranty	3 years

### OPTICAL DATA

Fixture luminous flux (lm)	5000
Luminaire efficacy (lm/W)	119
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	42
Primary Supply/Product voltage - min (V)	220.0
Lamp power factor	0.9
Electrical protection	Class I
Control gear required	No
Control gear type	Not required
Drive current (mA)	175
Inrush Current (A)	1
Inrush Duration (µs)	100
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	30

## Start Flood IP65 5000LM 840 Black 0050165

Max. products per 20A B Breaker	36
Connectable conductor cross section - Min (mm <sup>2</sup> )	1
Connectable conductor cross section - Max (mm <sup>2</sup> )	1

### LIFETIME DATA

Lifespan L70 B50	120000
Lifespan L80 B50	99000
Lifespan L80 B20	75000

### PHYSICAL DATA

Housing colour	Black
IP rating	IP65
IK rating	IK06
Diffuser finish	Transparent
Diffuser material	Glass
Nominal Product Length (mm)	122
Nominal Product Width (mm)	156
Weight (kg)	0.51

### PACKAGING

Single packaging type	Carton
Product EAN number	5410288501659
Packaging single width (cm)	4.5
Packaging single depth (cm)	17.5
DUN14 (outer)	15410288501656
Packaging outer length / height (cm)	30.0

### SAFETY DATA

Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No

# SYLVANIA

Start Flood IP65 5000LM 840 Black  
**0050165**

Suitable for household illumination

No

Light your world