

## RANA NEO Surface 600

RANA NEO 3500LM S 600 840 DALI EM 2L WHITE

0054219



### Product features

- Surface or Suspended LED luminaire with Micro Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 616x616x56mm, White body colour, IP20, IK07, DALI Dimmable, Emergency 3 hours, Low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 3500lm, 33W, 106lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<15, Luminance at 65° < 3000 cd/m2, Lifespan: 96,000 hours L80B20, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.




## PRODUCT OVERVIEW

|                                   |                                            |
|-----------------------------------|--------------------------------------------|
| Product name                      | RANA NEO 3500LM S 600 840 DALI EM 2L WHITE |
| Technology                        | LED (3 SDCM)                               |
| Cap/Base                          | N/A                                        |
| Housing                           | Steel                                      |
| Mount                             | Ceiling surface mounting, Suspended        |
| General application               | Education, Office                          |
| ETIM Class                        | EC002892                                   |
| Warranty                          | 5 years                                    |
| Useful luminous flux (Fuse)       | 3500                                       |
| Fixture luminous flux (lm)        | 3500                                       |
| Luminous flux (lm)                | 3500                                       |
| Luminaire efficacy (lm/W)         | 106                                        |
| Correlated colour temperature (k) | 4000                                       |
| Light colour                      | Neutral White                              |
| CRI (Ra)                          | 80                                         |
| Colour Variation Initial (SDCM)   | SDCM3                                      |
| Glare control                     | < 15                                       |
| Photobiological Risk Group        | RG0                                        |
| Luminous flux (emergency) (lm)    | 80                                         |
| Total power consumption (W)       | 33                                         |
| Electrical protection             | Class I                                    |
| Control gear type                 | LED driver constant current                |
| Dimmable                          | Yes                                        |
| Dimming method                    | DALI                                       |
| LED Flickering Rate               | Ultra low (5% or less)                     |
| Housing colour                    | RAL 9016 - Traffic white / Bezel           |
| IP rating                         | IP20                                       |
| IK rating                         | IK07                                       |
| Product EAN number                | 5410288542195                              |

## PHOTOMETRY

# RANA NEO Surface 600

**RANA NEO 3500LM S 600 840 DALI EM 2L WHITE**  
**0054219**

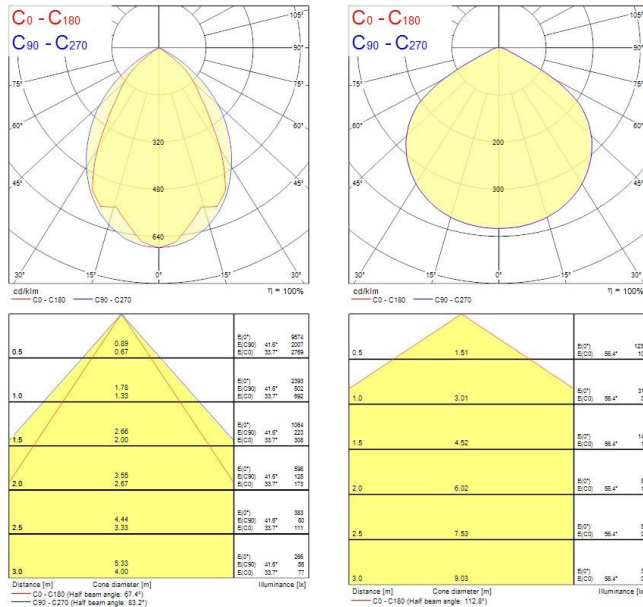

## TECHNICAL DRAWINGS

