

Features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 3000 lm, 27 W, 111 lm/W, 4000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 90000 hrs, 190 x 125 x 52 mm (L x W x H). Weight: 0.393 kg. IK05 rated PIR sensor included.


Product Overview

Product name	Start Flood IP65 PIR 3000LM 840 Black
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Wall surface mounted
Fixture luminous flux (lm)	3000
Luminaire efficacy (lm/W)	111
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG1
Total power consumption (W)	27
Electrical protection	Class I
Control gear type	Not required
Housing colour	Black
IP rating	IP65

Start Flood IP65 PIR 3000LM 840 Black 0050169

IK rating	IK05
Product EAN number	5410288501697
Warranty	3 years

Photometry

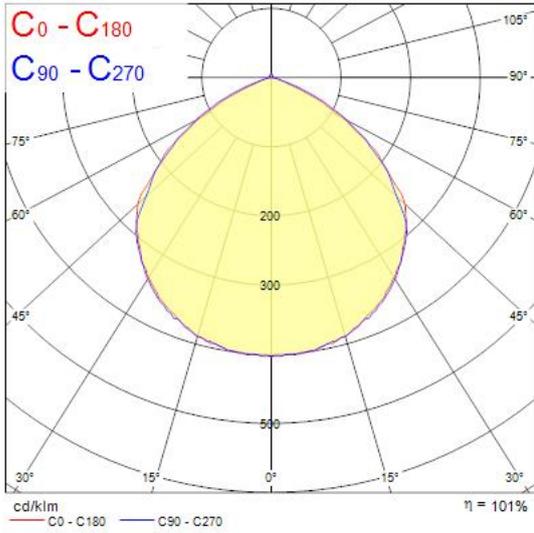

Technical drawings

