


## Start Flood IP65 PIR 5000LM 840 Black 0050170

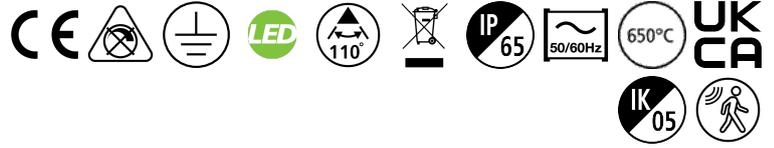

### Features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 5000 lm, 43 W, 116 lm/W, 4000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 120000 hrs, 201 x 156 x 57 mm (L x W x H). Weight: 0.515 kg. IK05 rated PIR sensor included.


### Product Overview

Product name	Start Flood IP65 PIR 5000LM 840 Black
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Wall surface mounted
Fixture luminous flux (lm)	5000
Luminaire efficacy (lm/W)	116
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG1
Total power consumption (W)	43
Electrical protection	Class I
Control gear type	Not required
Housing colour	Black
IP rating	IP65

## Start Flood IP65 PIR 5000LM 840 Black 0050170

<b>IK rating</b>	IK05
<b>Product EAN number</b>	5410288501703
<b>Warranty</b>	3 years

### Photometry

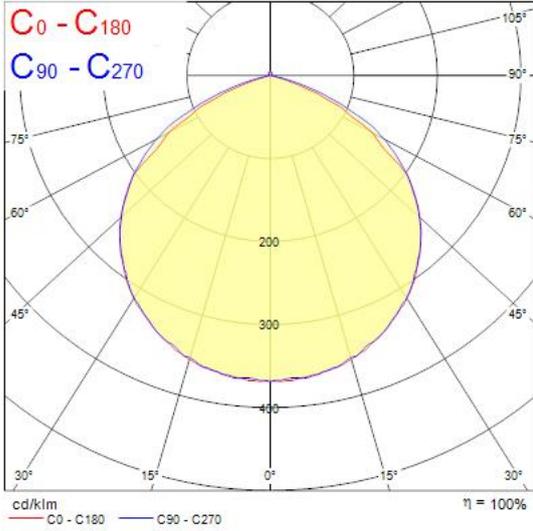

### Technical drawings

