


Data Sheet | Item Number: 267-412

Conductor support, base; without ground contact; with snap-in mounting feet; 7-pole; 2,50 mm²; white

<https://www.wago.com/267-412>



Color: ■ white

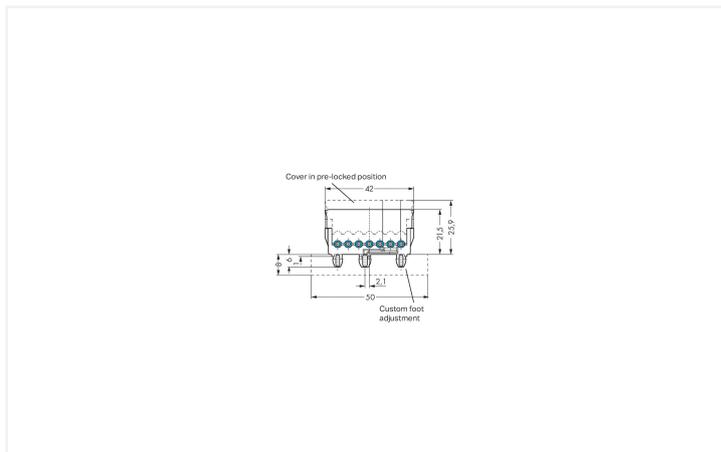

Dimensions in mm

Conductor support, 267 Series, IDC connection

Conductor support (item number 267-412) provides seamless electrical installations. Ensure that the strip lengths are 8 mm when connecting conductors to conductor support. Featuring one conductor terminal along with an IDC connection, this product is highly versatile. An Insulation Displacement Connection (IDC) is the perfect choice for supplying underfloor tanks, for example, using flat cables from 1.5 mm² to 16 mm² and the corresponding connection components. Conductor support is suitable for conductor cross sections ranging from 1.5 mm² to 2.5 mm².

Tin is used for coating the contact surfaces.

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated impulse withstand voltage	-	4 kV	-
Rated current	-	6 A	-

Connection Data

Number of connection types	1
Number of levels	1

Connection 1	
Connection technology	IDC connection
Solid conductor	1.5 ... 2.5 mm ²
Strip length	8 mm / 0.31 inches

Physical data

Width	40 mm / 1.575 inches
Height from the surface	21.5 mm / 0.846 inches
Depth	42 mm / 1.654 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V2
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact Plating	Tin
Fire load	0.142 MJ
Weight	4.7 g

Environmental requirements

Temperature stability	105 °C
-----------------------	--------

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
PU (SPU)	250 pcs
Packaging type	Bag
Country of origin	CN
GTIN	4050821830290
Customs tariff number	39269097900

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	NL-47718
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-100641

General approvals

UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizie- rungsinstitut	EN 61984	40032309

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 267-412



Documentation

Additional Information

Technical Section

03.04.2019

pdf

2027.26 KB



CAD/CAE-Data

CAD data

2D/3D Models 267-412



CAE data

EPLAN Data Portal
267-412



ZUKEN Portal 267-412

