

SYLPIPE HIGH OUTPUT

LED PIPE G2 L900 HIGH OUTPUT WW

0051043



PRODUCT OVERVIEW

Product name	LED PIPE G2 L900 HIGH OUTPUT WW
Technology	LED
Housing	PC Polycarbonate
E-number SE	7505150
Warranty	3 years
Fixture luminous flux (lm)	1300
Luminaire efficacy (lm/W)	101
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Total power consumption (W)	13
Electrical protection	Class II
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288510439

DATA TABLE

General data

Product name	LED PIPE G2 L900 HIGH OUTPUT WW
Technology	LED
Housing	PC Polycarbonate
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
E-number SE	7505150
Warranty	3 years

Optical data

Fixture luminous flux (lm)	1300
----------------------------	------

SYLPIPE HIGH OUTPUT

LED PIPE G2 L900 HIGH OUTPUT WW

0051043

Luminaire efficacy (lm/W)	101
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	13
Lamp power factor	0.9
Electrical protection	Class II
Drive current (mA)	125
Inrush Current (A)	2
Inrush Duration (µs)	50
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	15
Max. products per 20A B Breaker	15

Lifetime data

Lifespan L70 B50	30000
------------------	-------

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	900
Nominal Product Width (mm)	24
Weight (kg)	0.228

Packaging


Single packaging type	Carton
Product EAN number	5410288510439
Packaging single width (cm)	3.2
Packaging single depth (cm)	102.0
DUN14 (outer)	15410288510436
Packaging outer length / height (cm)	104.0

Safety data


Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

SYLPIPE HIGH OUTPUT LED PIPE G2 L900 HIGH OUTPUT WW 0051043

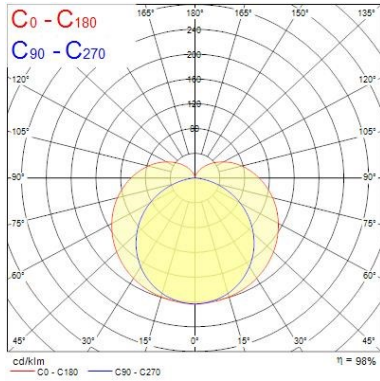

TECHNICAL DRAWINGS



L	H	W
300	35	24
600	35	24
900	35	24
1200	35	24
1500	35	24