




Features

- LED T5 replacement batten, high output range: more lumens per meter with efficiency up to 125 lum/watt, seamless linking (up to 10M), Ideal for direct lighting such as under cabinet or in kitchens, 150 degree beam angle, includes switch, includes 0.30m stripped cable, white polycarbonate body, includes standard and tilting brackets


Product Overview

Product name	LED PIPE G2 L900 HIGH OUTPUT WW
Technology	LED
Housing	PC Polycarbonate
E-number SE	7505150
Fixture luminous flux (lm)	1300
Luminaire efficacy (lm/W)	101
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Total power consumption (W)	13
Electrical protection	Class II
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288510439
Warranty	3 years

Photometry

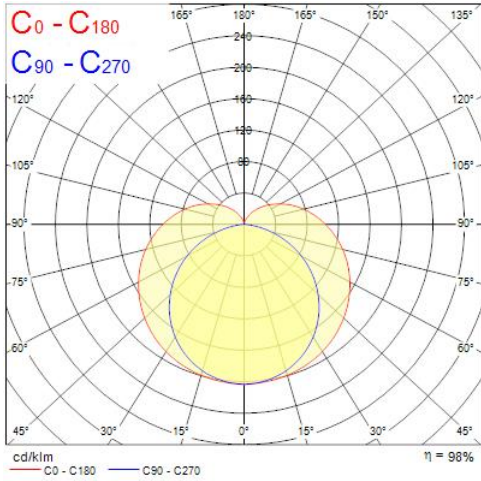

Technical drawings

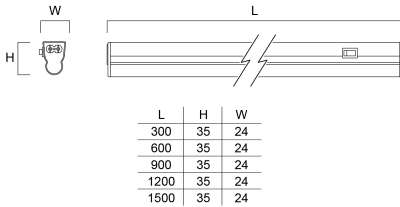

Data table

GENERAL DATA

Product name	LED PIPE G2 L900 HIGH OUTPUT WW
Technology	LED
Housing	PC Polycarbonate
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25

LED PIPE G2 L900 HIGH OUTPUT WW 0051043

E-number SE	7505150
Warranty	3 years

OPTICAL DATA

Fixture luminous flux (lm)	1300
Luminaire efficacy (lm/W)	101
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	13
Lamp power factor	0.9
Electrical protection	Class II
Control gear required	No
Drive current (mA)	125
Inrush Current (A)	2
Inrush Duration (µs)	50
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	15
Max. products per 20A B Breaker	15

LIFETIME DATA

Lifespan L70 B50	30000
------------------	-------

PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	900

LED PIPE G2 L900 HIGH OUTPUT WW 0051043

Nominal Product Width (mm)	24
Weight (kg)	0.228

PACKAGING

Single packaging type	Carton
Product EAN number	5410288510439
Packaging single width (cm)	3.2
Packaging single depth (cm)	102.0
DUN14 (outer)	15410288510436
Packaging outer length / height (cm)	104.0

SAFETY DATA

Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No