


# Data Sheet | Item Number: 267-314

Conductor support; without ground contact; with snap-in mounting feet; 4-pole; 2,50 mm<sup>2</sup>; white

<https://www.wago.com/267-314>

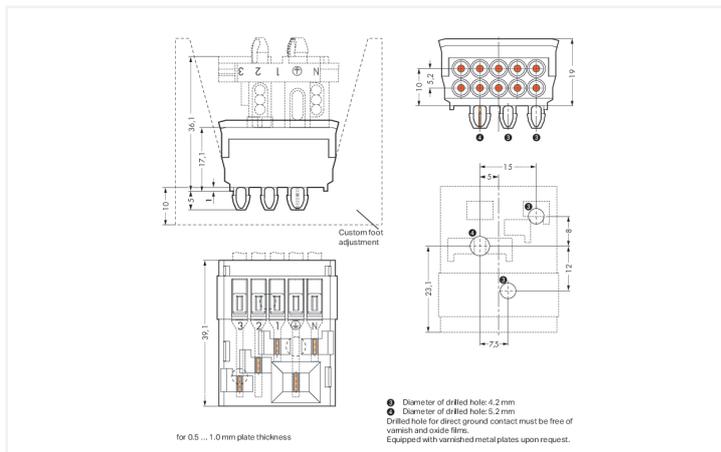

Color: ■ white

Similar to illustration

Dimensions in mm

3) Drilled hole diameter: 4.2 mm 4) Drilled hole diameter: 5.2 mm Drilled hole for direct PE contact must be free of varnish and oxide films. Equipped with varnished metal plates upon request.

Conductor support, 267 Series, white

Conductor support (item number 267-314) simplifies electrical installations. Conductors should only be connected to conductor support if their strip length is between 11 and 12 mm . Conductor support is suitable for conductor cross sections ranging from 0.5 mm<sup>2</sup> to 1 mm<sup>2</sup>.

Tin is used for coating the contact surfaces.

## Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated impulse withstand voltage	-	4 kV	-
Rated current	-	16 A	-

## Ratings per IEC/EN 2

Rated current 6 A

## Connection Data

Number of connection types 1

### Connection 1

Solid conductor 0.5 ... 1 mm<sup>2</sup>  
 Strip length 11 ... 12 mm / 0.43 ... 0.47 inches  
 Pole number 4

### Physical data

Width	39.1 mm / 1.539 inches
Height from the surface	19 mm / 0.748 inches

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	white
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E <sub>Cu</sub> )
Contact Plating	Tin
Fire load	0.291 MJ
Weight	16.9 g

### Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C
Temperature stability	105 °C

### Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	PL
GTIN	4045454415457
Customs tariff number	85366990990

### Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

### Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 267-314	<a href="#">↓</a>
--	-------------------

Documentation

Additional Information

Technical Section	03.04.2019	pdf 2027.26 KB	<a href="#">↓</a>
-------------------	------------	-------------------	-------------------

CAD/CAE-Data

CAD data

2D/3D Models 267-314	<a href="#">↓</a>
----------------------	-------------------

CAE data

ZUKEN Portal 267-314	<a href="#">↓</a>
----------------------	-------------------