


## Data Sheet | Item Number: 267-328

Snap-on type conductor support; without ground contact; 4-pole; 2,50 mm<sup>2</sup>; white/gray

<https://www.wago.com/267-328>



Color:  white/gray

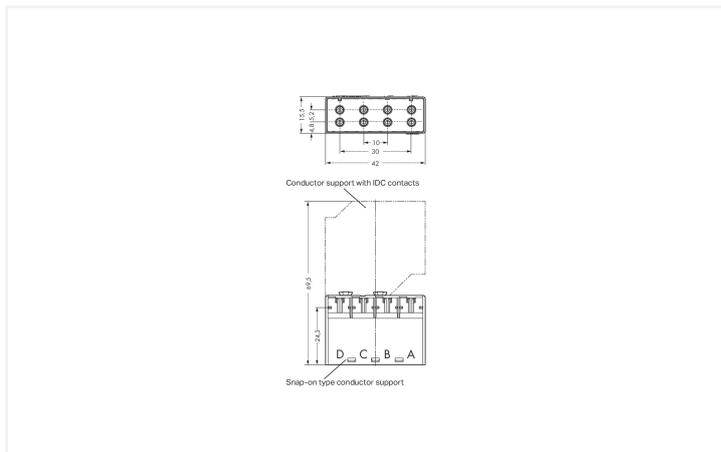

Dimensions in mm

Conductor support, 267 Series, white/gray

Effortless electrical installations are guaranteed with conductor support (item number 267-328). Conductors should only be connected to conductor support if their strip length is between 11 and 12 mm. Featuring one conductor terminal along with PUSH WIRE®, this product is highly versatile. Our trusted PUSH WIRE® connection offers the fastest method for clamping conductors. It utilizes the conductor's stiffness to overcome the clamping spring's contact force. The dimensions are (42 x 15.5 x 29.5) mm (width x height x depth). Conductor support is suitable for conductor cross sections ranging from 1.5 mm<sup>2</sup> to 2.5 mm<sup>2</sup>.

Tin is used for coating the contact surfaces.

### Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated impulse withstand voltage	-	4 kV	-
Rated current	-	16 A	-

### Connection Data

Clamping units	8
Total number of potentials	4
Number of connection types	1
Number of levels	1

#### Connection 1

Connection technology	PUSH WIRE®
Solid conductor	1.5 ... 2.5 mm <sup>2</sup>
Strip length	11 ... 12 mm / 0.43 ... 0.47 inches
Pole number	4

### Physical data

Width	42 mm / 1.654 inches
Height	15.5 mm / 0.61 inches
Depth	29.5 mm / 1.161 inches

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	white/gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E <sub>cu</sub> )
Contact Plating	Tin
Fire load	0.279 MJ
Weight	15.4 g

### Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C
Temperature stability	105 °C

### Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
PU (SPU)	500 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4045454572211
Customs tariff number	39269097900

### Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

### Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 267-328	↓
--	---

Documentation

Additional Information

Technical Section	03.04.2019	pdf 2027.26 KB	↓
-------------------	------------	-------------------	---

CAD/CAE-Data

CAD data

2D/3D Models 267-328	↓
----------------------	---

CAE data

ZUKEN Portal 267-328	↓
----------------------	---