



### Features

- Surface or Suspended LED Linear luminaire with Micro Prismatic Optic, Dimensions: 1150mm x 87mm x 87mm, Direct, White Body, Warm White LED (3000K), 3030lm, 31W, 98lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse), Low LED Flicker (+/-5%), UGR<21, L90B10 at 50,000 hours, Electric Class1, Glow Wire Test 850°C

### Product Overview


<b>Product name</b>	RANA LINEAR S 3KLM WW MPO
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling surface mounting, Suspended
<b>Fixture rating</b>	Enclosed
<b>Environment</b>	Internal
<b>E-number SE</b>	7502667
<b>Fixture luminous flux (lm)</b>	3030
<b>Luminaire efficacy (lm/W)</b>	97.74
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	3000
<b>Light colour</b>	Warm White
<b>CRI (Ra)</b>	80
<b>Colour Consistency (SDCM)</b>	3
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 21
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	31
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	Electronic ballast

Light your world


## RANA LINEAR S 3KLM WW MPO 0051253

LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288512532
Warranty	5 years

### Photometry

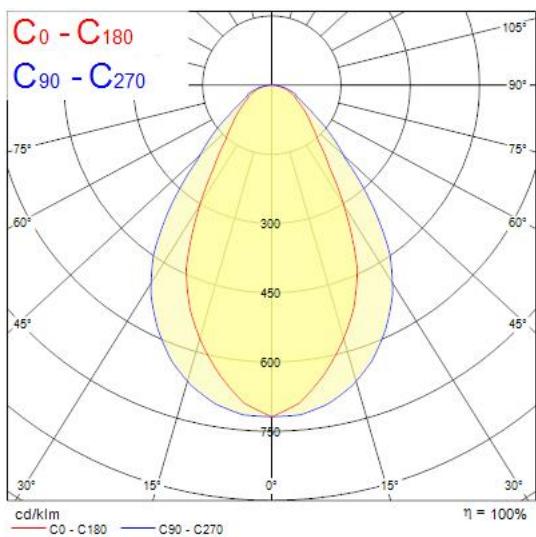

### Technical drawings

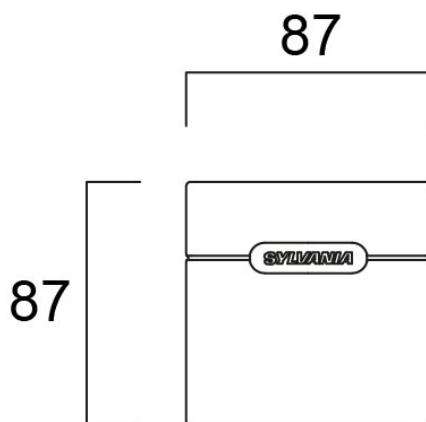

Light your world