

27 802 970 Product version up to 6/3/2020



- COMPACT RAIN, max. flow rate 15 l/min (at 3 bar)
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection
- with anti-scale system

technical data:

- rosette 60 x 60 mm
- 1/2" connection

Notes:

Intrinsic protection against back flow.

Recommended miscellaneous


Concealed wall elbow -

35 085 970 90


- min. recess depth 90 mm
- max. recess depth 163 mm



27 802 970 Product version up to 6/3/2020
mm [inches]

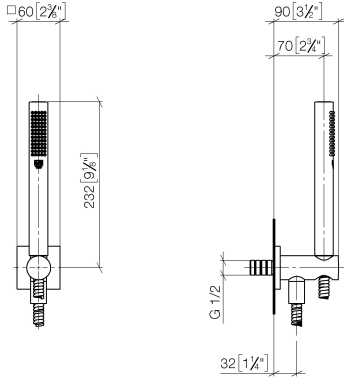

Flow rate chart

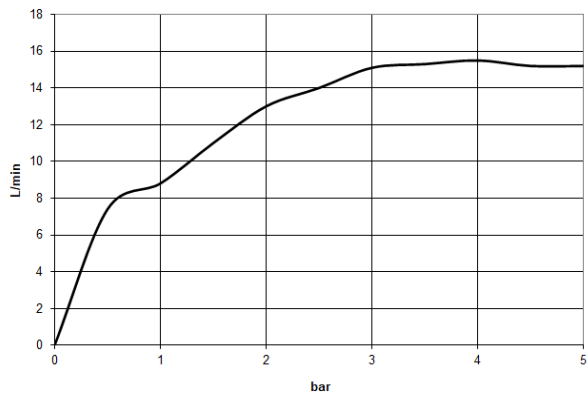

Codes & Standards

DIN 4109

EN 1717

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Hand shower set with integrated shower holder - Brushed Durabronze (23kt Gold)

SERIES SPECIFIC

27 802 970 Product version up to 6/3/2020


Certificates and sustainability

Belgaqua_21-024-2 LGA_29

LGA_29

WRAS_250402

Belgaqua_25-344-2

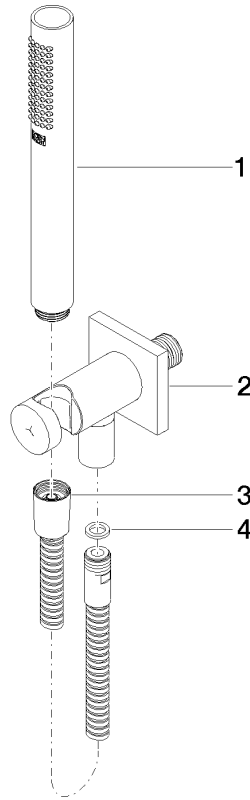

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
4	90 14 20 026 00 90	Washer 14 x 8 x 2 mm Centellen WS 3820 -	1.00	14
2	28 490 970-28	Wall elbow with integrated shower holder - Brushed Durabron (23kt Gold)	1.00	40
3	90 30 02 072 00-28	Metal shower hose 1/2" x 3/8" x 1250 mm - Brushed Durabron (23kt Gold)	1.00	40
1	90 12 11 140 40-28	Bar-type hand shower 15 l/min. - Brushed Durabron (23kt Gold)	1.00	-

Spare part can no longer be ordered, please order the replacement item