www.bticino.com

LIGHTnow

Socket outlet - Franco-Belgian standard

Y4142AF - YW4142AF - YG4142AF - YD4142AF
Y4142AFR YW4142AFP - YG4142AFP - YD4142AFP
YW4942AF - YG4942AF - YD4942AF
YW4942A - YG4942A - YD4942A


Y.4942A


..4942AF


Y4142AF


..4142AF..


..4142AFP

Use

16 A - 250 Vac Franco-Belge standard socket outlet.
Mechanism supplied with front cover.
Mechanism to be completed with cover plates and supports.
Flush or wall mounting.

Range

Designation	Item
Socket 2P+E 16A 250 Va.c. - Flat - Shielded tulip contacts	☐ YW4142AF ▒ YG4142AF ■ YD4142AF ■ Y4142AFR
Socket 2P+E 16A 250 Va.c. - Shielded tulip contacts with cover	☐ YW4142AFP ▒ YG4142AFP ■ YD4142AFP
Socket 2P+E 16A 250 Va.c. - Shielded tulip contacts To be completed with Flat front covers :..4942AF	▨ Y4142AF
• Cover flat	☐ YW4942AF ▒ YG4942AF ■ YD4942AF
• Cover standard	☐ YW4942A ▒ YG4942A ■ YD4942A

Color code: ☐ White ▒ Stone ■ Dark ■ Red

Overall dimensions (mm)

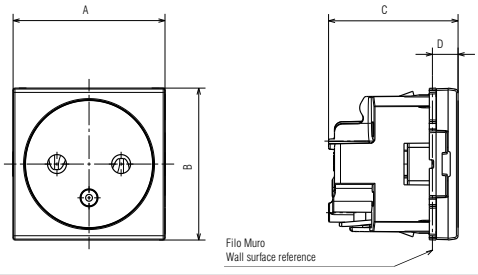

	A	B	C	D
..4142AF	45.1	44.7	39.1	8.6
..4142AFP	45.1	44.7	41.7	11.2

Connection

Terminal type: screw clamp
Terminal capacity: 2 x 2.5 mm^2 max
Stripping length: 12 mm
Compatible with flexible or rigid cables

Technical characteristics

- Protection index
(considering a complete installation, including cover plate)
Penetration by solid bodies/liquid: IP20D

- Mechanical characteristics
Impact test: IK 04

- Material characteristics
Case and Key cover: PC (Polycarbonate)

Halogen free.

UV resistant.

Self-extinguishing:
850° C / 30 s for insulating parts holding live parts in place
650° C / 30 s for other parts made of insulating materials

- Electrical characteristics
Voltage: 250 VAC
Current: 16 A

- Climatic characteristics
Storage temperature: - 10° C to + 70° C
Use temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC 60884-1.
Refer to e.catalogue.