

Data Sheet | Item Number: 267-304


Conductor support; with direct ground contact; with snap-in mounting feet; 4-pole; 2,50 mm²; white

<https://www.wago.com/267-304>



Color: ■ white

Similar to illustration

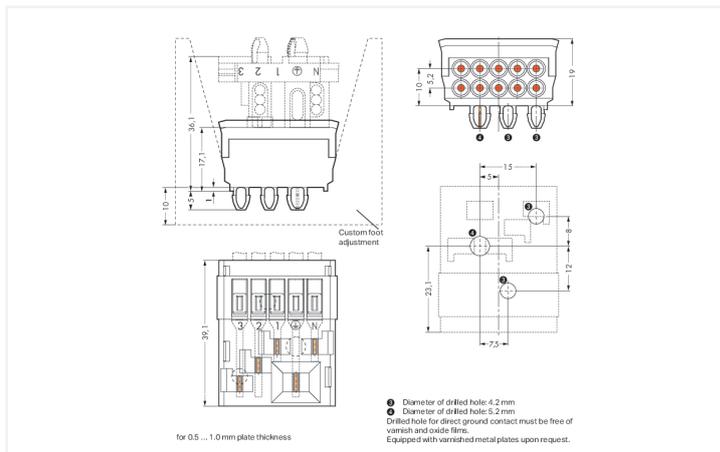

Dimensions in mm

3) Drilled hole diameter: 4.2 mm 4) Drilled hole diameter: 5.2 mm Drilled hole for direct PE contact must be free of varnish and oxide films. Equipped with varnished metal plates upon request.

Conductor support, 267 Series, white

Our conductor support (item number 267-304) ensures effortless electrical installations. Strip lengths must be between 11 and 12 mm when connecting conductors to conductor support. Conductor support is suitable for conductor cross sections ranging from 0.5 mm² to 1 mm².

Tin is used for coating the contact surfaces.

Electrical data

| Ratings per | IEC/EN 60664-1 | | |
|---------------------------------|----------------|-------|----|
| Overvoltage category | III | III | II |
| Pollution degree | 3 | 2 | 2 |
| Nominal voltage | - | 500 V | - |
| Rated impulse withstand voltage | - | 4 kV | - |
| Rated current | - | 16 A | - |

| Ratings per IEC/EN 2 | |
|----------------------|-----|
| Rated current | 6 A |

Connection Data

| | |
|----------------------------|---|
| Number of connection types | 1 |
|----------------------------|---|

| Connection 1 | |
|-----------------|-------------------------------------|
| Solid conductor | 0.5 ... 1 mm ² |
| Strip length | 11 ... 12 mm / 0.43 ... 0.47 inches |
| Pole number | 4 |

Physical data

| | |
|-------------------------|------------------------|
| Width | 39.1 mm / 1.539 inches |
| Height from the surface | 19 mm / 0.748 inches |

Material data

| | |
|------------------------------------|--|
| Note (material data) | Information on material specifications can be found here |
| Color | white |
| Material group | I |
| Insulation material (main housing) | Polyamide (PA66) |
| Flammability class per UL94 | V0 |
| Clamping spring material | Chrome-nickel spring steel (CrNi) |
| Contact material | Electrolytic copper (E _{Cu}) |
| Contact Plating | Tin |
| Fire load | 0.291 MJ |
| Weight | 17.9 g |

Environmental requirements

| | |
|-----------------------|--------|
| Temperature stability | 105 °C |
|-----------------------|--------|

Commercial data

| | |
|-----------------------|---------------|
| PU (SPU) | 50 pcs |
| Packaging type | Box |
| Country of origin | PL |
| GTIN | 4045454415426 |
| Customs tariff number | 85366990990 |

Product Classification

| | |
|-------------|----------------------|
| UNSPSC | 39121409 |
| eCl@ss 10.0 | 27-44-03-14 |
| eCl@ss 9.0 | 27-44-03-14 |
| ETIM 9.0 | EC002560 |
| ETIM 10.0 | EC002560 |
| ECCN | NO US CLASSIFICATION |

Environmental Product Compliance

| | |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|

Approvals / Certificates

General approvals



| Approval | Standard | Certificate Name |
|---|----------|------------------|
| UL UL International Germany GmbH | UL 1977 | E45171 |
| VDE VDE Prüf- und Zertifizie- rungsinstitut | EN 61984 | 40032309 |

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 267-304



Documentation

Additional Information

Technical Section

03.04.2019

pdf

2027.26 KB



CAD/CAE-Data

CAD data

2D/3D Models 267-304



CAE data

ZUKEN Portal 267-304

