

### Features

- Ceiling recessed LED downlight IP44 (from the front), with only 55mm product depth and 175mm cutout. Supplied with TCI 1-10V Jolly driver (123401). Ideal replacement for 1x32W/2x18W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 1400LM, 15W, 93lm/W, 3000K, Driver Current: 380mA, CRI80, 74° beam angle, IP44 from the front, IK07, (HxW) 55x195mm, Class 2, 220-240V


### Product Overview

Product name	START Downlight 175 IP44 1-10V 1400Lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
E-number FI	4278175
Fixture luminous flux (lm)	1400
Luminaire efficacy (lm/W)	93
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	15
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP44/20

## START Downlight 175 IP44 1-10V 1400Lm 830 0030342

IK rating	IK07
Product EAN number	5410288303420
Warranty	5 years

### Photometry

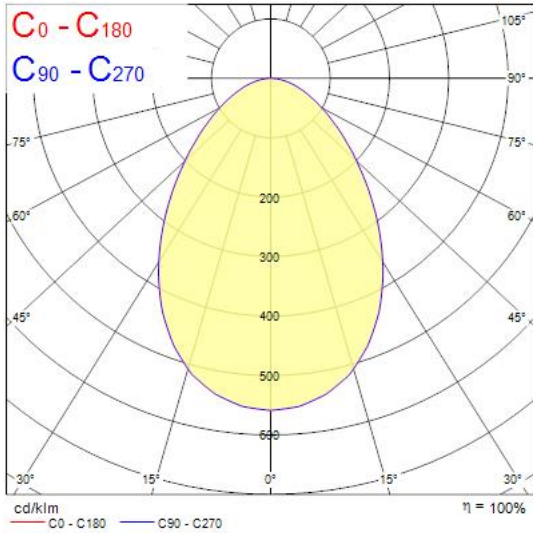

### Technical drawings

