

RANA Linear Surface&Suspended - MicroPrismatic Optic
RANA LINEAR S 3KLM NW MPO 1-10 EM
0051260




PRODUCT OVERVIEW

Product name	RANA LINEAR S 3KLM NW MPO 1-10 EM
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Fixture rating	Enclosed
Environment	Internal
Warranty	5 years
Fixture luminous flux (lm)	2890
Luminaire efficacy (lm/W)	82.57
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Glare control	< 21
Photobiological Risk Group	RG0
Total power consumption (W)	35
Electrical protection	Class I
Control gear type	Electronic ballast
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288512600

PHOTOMETRY

RANA Linear Surface&Suspended - MicroPrismatic Optic
RANA LINEAR S 3KLM NW MPO 1-10 EM
0051260

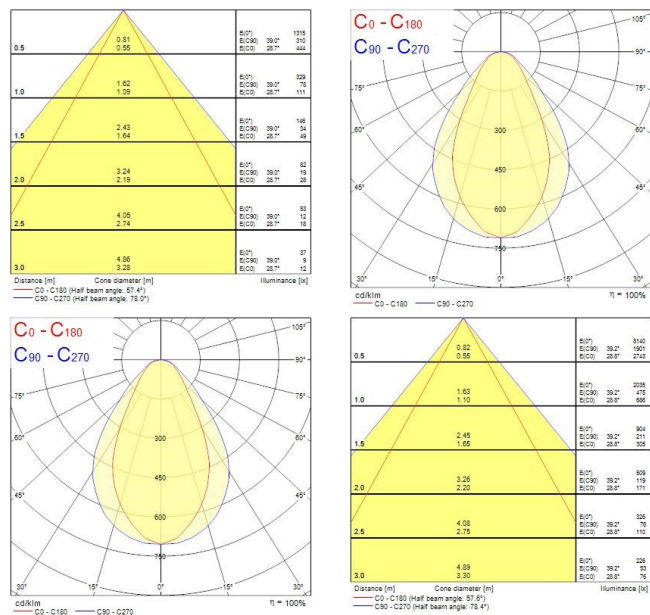

TECHNICAL DRAWINGS

