

# Motion detector, 230 V, 13 m, 180°, IP54, with orientable lens, for surface mounting, anthracite

**350-20150**



230 V



stand-alone



IP54



N.O.



180°



13 m from a height of 3 m



2 m - 3 m



surface-mounting



This 1-channel outdoor motion detector is especially suitable for use in a driveway or garden. The detection range can be set to between 0 and 13 m. The detection area can be divided using an adjustable protection mask. The motion sensor can be precisely aimed. The device has a built-in light sensor and switches the lighting on automatically or manually with an N.G. push button (to be ordered separately). After the pre-set time delay, the light is switched off automatically. This motion detector has an IP54 protection degree and complies with the European directives for EMC and safety, EN 60669-2-1.

Colour: anthracite

Compatible secondary detectors:


Compatible master detectors:

- Sustainable
- Functional
- Elegant
- Simple installation
- Energy saving
- Greater comfort
- Improved burglary protection

Motion detector for use in carports, gardens, etc.

## Detection range

H	A Across	B Towards
2 m	8 m	4 m
2.5 m	11 m	5.5 m
3 m	13 m	6.5 m

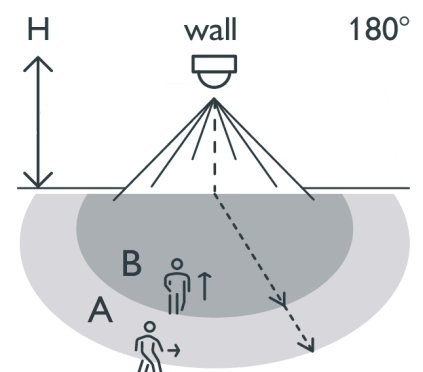


- The outdoor motion detector is fitted with a built-in light sensor; the lighting only turns on if the detector detects motion in the detection range and the level of daylight is below the programmed lux value.
- The lighting remains on while motion is detected.
- The built-in time switch allows you to set the desired switch-off delay. The lighting will remain on throughout the disconnection time after the last movement has been detected.
- The sensor's lens can be covered with the cover mask provided, so you can divide the detection zone. The cover mask can be adapted according to the desired range.

## Technical features

Configuration	stand-alone
Input voltage	230 Vac
Detector output	230 V (ON/OFF)
Switch-off delay	8 sec – 1,800 sec
Maximum MCB rating	-10
Detection angle	180 °
Detection range (PIR)	13 m from a height of 3 m
Minimum ambient temperature	-20 °C
Maximum ambient temperature	+45 °C
Mounting method	surface mounting
Mounting height	2 m – 3 m
Colour	anthracite
Dimensions visible (HxWxD)	70 mm x 90 mm
Dimensions (HxWxD)	70 mm x 90 mm x 130 mm
Protection degree standalone	IP54

## Dimensions

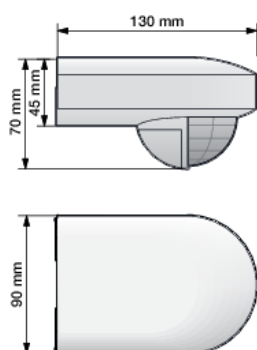

## Wiring diagram

