



## INSAVER SQUARE 200

INSAVER UGR19 IP44 200 2350 830 SQ  
0030512



### Product features

- Insaвер is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 20W; 2350lm; 118lm/W; 3000K; UGR <19 with shallow product depth 65mm. Meets TP(a) requirements.

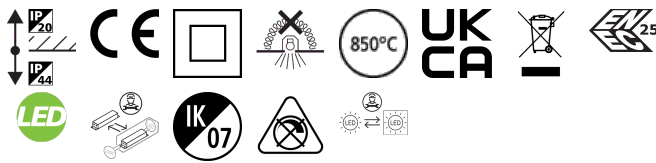



### PRODUCT OVERVIEW

Product name	INSAVER UGR19 IP44 200 2350 830 SQ
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278541
Warranty	5 years
Useful luminous flux (Fuse)	2350
Fixture luminous flux (lm)	2350
Luminaire efficacy (lm/W)	118
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9010 - Pure white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288305127

### PHOTOMETRY

## INSAVER SQUARE 200

INSAVER UGR19 IP44 200 2350 830 SQ  
0030512

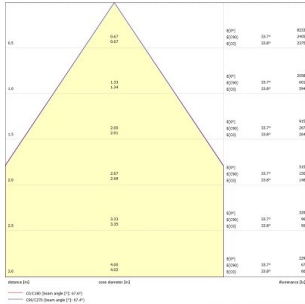

### TECHNICAL DRAWINGS

