



Features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Dimmable DALI driver of TRIDONIC (LCA 17W 250–700mA one4all SR PRE 28000670), 9W; 1075lm; 119lm/W; 3000K; UGR <19 with shallow product depth 50mm. Meets TP(a) requirements.


Product Overview

| | |
|---------------------------------|---------------------------------------|
| Product name | Insaver Slim 150 IP44 DALI 1075lm 830 |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| E-number FI | 4278070 |
| Fixture luminous flux (lm) | 1075 |
| Luminaire efficacy (lm/W) | 119 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | NA |
| Glare control | < 19 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 9 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9003 - Signal white |
| IP rating | IP44/20 |
| IK rating | IK07 |

Insaver Slim 150 IP44 DALI 1075lm 830 0030348

| | |
|--------------------|---------------|
| Product EAN number | 5410288303482 |
| Warranty | 5 years |
| Colour Code | 830 |

Photometry

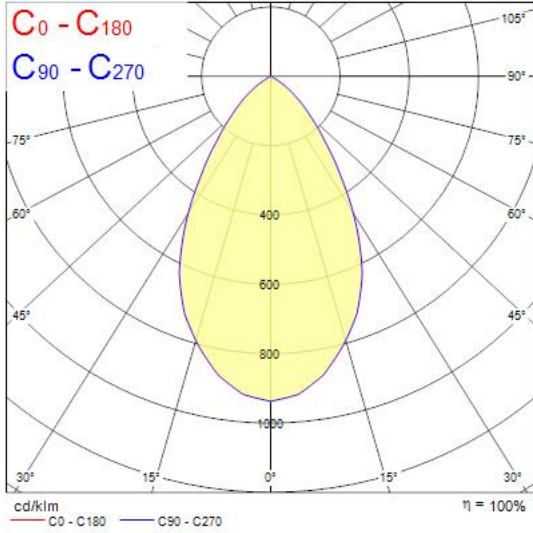

Technical drawings

