


Walraven Threaded Rod

(K5510)

for threaded connections, hangers and ties,

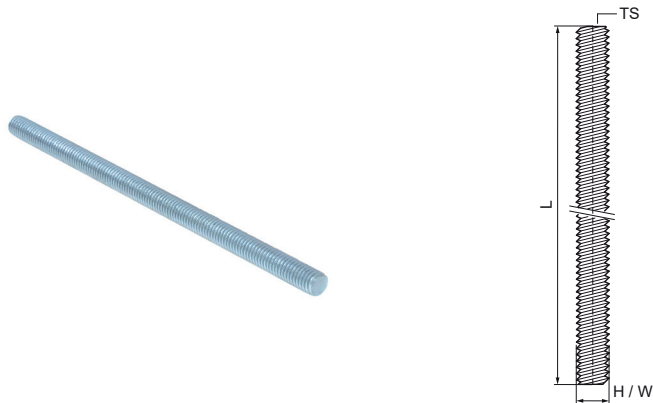

Features & benefits

- according to DIN 976-1
- material: steel, strength class 4.8
- zinc plated
- thread with 60° angle provides best performance
- M10 and M12 tested for fire safety according to EN 1363-1
- M7B: pitch = M7 x 1 mm
- M7F: pitch = M7 x 1.5 mm



Product Number	NRF Number	Norm / Standard	Thread Size	Total Length	Total Height	Total Width
Reference Letter			TS	L	H	W
Unit description				mm	mm	mm
6303006	2165001	DIN 976-1	M6	1,000	6	6
6303008	2165002	DIN 976-1	M8	1,000	8	8
6303010	2165003	DIN 976-1	M10	1,000	10	10
6303012	2165004	DIN 976-1	M12	1,000	12	12
6303016	2165005	DIN 976-1	M16	1,000	16	16
6303020	3486199	DIN 976-1	M20	1,000	20	20
6303206	1386632	DIN 976-1	M6	2,000	6	6
6303208	2165006	DIN 976-1	M8	2,000	8	8
6303210	2165007	DIN 976-1	M10	2,000	10	10
6303212	3489325	DIN 976-1	M12	2,000	12	12
6303216	3486202	DIN 976-1	M16	2,000	16	16
6303306	1386633	DIN 976-1	M6	3,000	6	6
6303308	3489326	DIN 976-1	M8	3,000	8	8
6303310	3489327	DIN 976-1	M10	3,000	10	10
6303312	1386634	DIN 976-1	M12	3,000	12	12
6303316	1386635	DIN 976-1	M16	3,000	16	16