

## INSAVER SLIM 175


*Insaver Slim 175 IP44 DALI 1525lm 830*

0030350



### Product features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Dimmable DALI driver of TRIDONIC (LCA 17W 250-700mA one4all SR PRE 28000670), 13W; 1525lm; 117lm/W; 3000K; UGR <19 with shallow product depth 60mm. Meets TP(a) requirements.

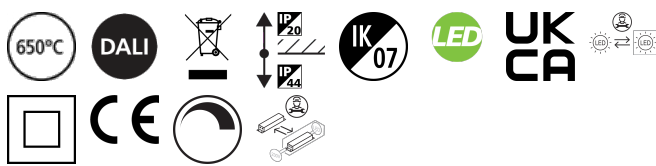

### PRODUCT OVERVIEW





|                                 |                                       |
|---------------------------------|---------------------------------------|
| Product name                    | Insaver Slim 175 IP44 DALI 1525lm 830 |
| Technology                      | LED                                   |
| Cap/Base                        | N/A                                   |
| Housing                         | Aluminium                             |
| Mount                           | Ceiling recessed mounting             |
| General application             | Hospitality, Office, Retail           |
| ETIM Class                      | EC001744                              |
| E-number FI                     | 4278073                               |
| Warranty                        | 5 years                               |
| Fixture luminous flux (lm)      | 1525                                  |
| Luminaire efficacy (lm/W)       | 117                                   |
| Colour temperature (K)          | 3000                                  |
| Colour Code                     | 830                                   |
| Light colour                    | Warm White                            |
| CRI (Ra)                        | 80                                    |
| Colour Variation Initial (SDCM) | SDCM3                                 |
| Beam Angle (°)                  | 61                                    |
| Beam Angle (°)                  | NA                                    |
| Glare control                   | < 19                                  |
| Photobiological Risk Group      | RG1                                   |
| Total power consumption (W)     | 13                                    |
| Electrical protection           | Class II                              |
| Control gear type               | LED driver constant current           |
| Dimmable                        | Yes                                   |
| Dimming method                  | DALI                                  |
| Minimum dimming level (%)       | 1                                     |
| LED Flickering Rate             | Ultra low (5% or less)                |
| Housing colour                  | RAL 9003 - Signal white               |
| IP rating                       | IP44/20                               |
| IK rating                       | IK07                                  |
| Product EAN number              | 5410288303505                         |

## INSAVER SLIM 175

Insaver Slim 175 IP44 DALI 1525lm 830

0030350

### PHOTOMETRY



### TECHNICAL DRAWINGS

