


Walraven Heavy Duty Clamp HD1501 (M16) (BUP1000)

(A1006)

for metal pipes

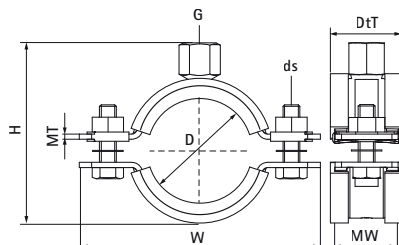

Features & benefits

- two-part clamp with two locking bolts
- heavy design
- bolts secured with anti-loss washer
- with CO2 welded connection nut
- material: steel
- surface protection:
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 18 dB(A)
- tested for fire safety



Product Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Width x Total Height x Total Depth	Material Width x Material Thickness	Screw Size	Approvals	Maximum Allowed Load Faz
Reference letter	D	D	D	G	W x H x DtT	MW x MT	ds		F _{0,z}
Unit description	mm		"		mm x mm x mm	mm x mm			N
33168169	159 - 169	DN 150	6	M16	254 x 220 x 40	38 x 4	M10	ITB (KOT) ETA ISO 3822-1 CE RAL-GZ 655/B	3,800
33168188	178 - 188	-	-	M16	274 x 239 x 40	38 x 4	M10	ITB (KOT) ETA ISO 3822-1 CE RAL-GZ 655/B	3,800
33168204	194 - 204	-	-	M16	290 x 255 x 40	38 x 4	M10	ITB (KOT) ETA ISO 3822-1 CE RAL-GZ 655/B	3,800
33168213	203 - 213	-	-	M16	299 x 264 x 40	38 x 4	M10	ITB (KOT) ETA ISO 3822-1 CE RAL-GZ 655/B	3,800
33168227	217 - 227	DN 200	8	M16	322 x 278 x 40	38 x 4	M12	ITB (KOT) ETA ISO 3822-1 CE RAL-GZ 655/B	3,800
33168250	240 - 250	-	-	M16	345 x 289 x 40	38 x 4	M12	ITB (KOT) ETA ISO 3822-1 CE RAL-GZ 655/B	3,800
33168275	265 - 275	DN 250	10	M16	367 x 327 x 50	38 x 5	M12	ITB (KOT) ETA ISO 3822-1 CE RAL-GZ 655/B RAL-GZ 656	9,200
33168325	315 - 325	DN 300	12	M16	414 x 374 x 50	38 x 5	M12	ITB (KOT) ETA ISO 3822-1 CE RAL-GZ 655/B RAL-GZ 656	9,200
33168364	354 - 364	DN 350	14	M16	453 x 412 x 50	38 x 5	M12	ITB (KOT) ETA ISO 3822-1 CE RAL-GZ 655/B RAL-GZ 656	9,200
33168408	398 - 408	DN 400	16	M16	498 x 444 x 50	38 x 5	M12	ITB (KOT) ETA ISO 3822-1 CE RAL-GZ 655/B RAL-GZ 656	9,200
33168458	448 - 458	DN 450	18	M16	548 x 494 x 50	38 x 5	M12	ITB (KOT) ETA ISO 3822-1 CE RAL-GZ 655/B RAL-GZ 656	9,200
33168509	499 - 509	DN 500	20	M16	599 x 545 x 50	38 x 5	M12	ITB (KOT) ETA ISO 3822-1 CE RAL-GZ 655/B RAL-GZ 656	9,200