


Data Sheet | Item Number: 267-177

Female connector; with direct ground contact; with snap-in mounting feet; 7-pole;
1,00 mm²; white

<https://www.wago.com/267-177>



Color: ■ white

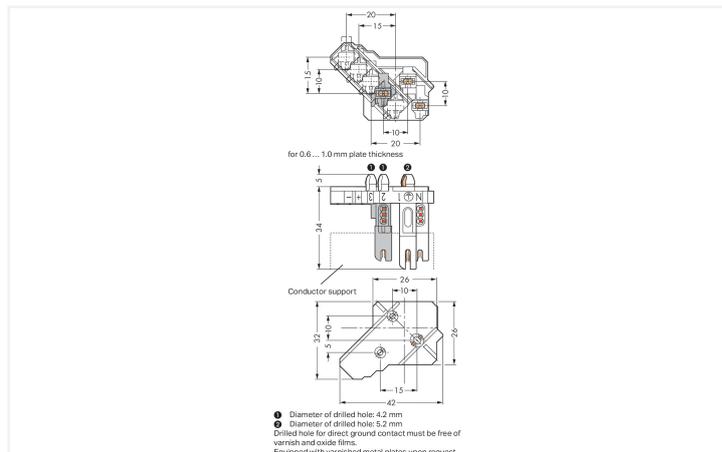

Dimensions in mm

1) Diameter of drilled hole: 4.2 mm 2) Diameter of drilled hole: 5.2 mm
Drilled hole for direct PE contact must be free of varnish and oxide films. Equipped with varnished metal plates upon request.

Female connector, 267 Series, PUSH WIRE®

This female connector (item number 267-177) provides hassle-free electrical installations. Ensure that the strip lengths are 8 mm when connecting conductors to this female connector. Featuring one conductor terminal along with PUSH WIRE®, this connector is highly versatile. Our PUSH WIRE® connection uses the stiffness of the conductor to overcome the clamping spring's contact force, allowing faster and easier conductor clamping. Dimensions: (26 x 39 x 42) mm (width x height x depth). Depending on the type of conductor, this female connector is ideal for conductor cross sections ranging from 0.5 mm² to 1 mm².

The contact surface is coated with tin.

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated impulse withstand voltage	-	4 kV	-
Rated current	-	6 A	-

Connection Data

Number of connection types	1
----------------------------	---

Connection 1

Connection technology	PUSH WIRE®
Solid conductor	0.5 ... 1 mm ²
Strip length	8 mm / 0.31 inches
Pole number	7

Physical data

Width	26 mm / 1.024 inches
Height	39 mm / 1.535 inches
Height from the surface	34 mm / 1.339 inches
Depth	42 mm / 1.654 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact Plating	Tin
Fire load	0.233 MJ
Weight	13 g

Environmental requirements

Temperature stability	105 °C
-----------------------	--------

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
PU (SPU)	500 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4044918499835
Customs tariff number	85366990990

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	NL-47718
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-100641
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizie- rungsinstitut	EN 61984	40032309

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 267-177	↓
---	---

Documentation

Additional Information

Technical Section	03.04.2019	pdf 2027.26 KB	↓
-------------------	------------	-------------------	---

CAD/CAE-Data

CAD data

2D/3D Models 267-177	↓
----------------------	---

CAE data

EPLAN Data Portal 267-177	↓
ZUKEN Portal 267-177	↓

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com