

Daylight control module with twilight switch, 230 V, 3 lux – 300 lux, 2-wire

360-36194

CE

4 year warranty



230 V



IP20



N.O.



3 lx – 300 lx



Daylight control module with twilight switch is durable and functional. It is a complete set containing the daylight control module and twilight switch. The daylight control module is suitable for car parks, outdoor areas, footpaths... The lighting is switched on automatically once the light level is below the preset level (standard setting: 35 lux). In the morning the lighting switches off automatically once the set lux level is exceeded by 10 %. The lux level is easy to set using the potentiometer on the daylight control module. There is a double cable connecting the daylight control module and the twilight switch.

- Sustainable
- Functional
- Complete kit: daylight control mode with daylight switch


Daylight control mode for car parks, outdoor spaces, paths, etc.

- The lighting turns on automatically in the evening, when the light intensity passes below the set value (standard setting: 35 lux). The lighting turns off automatically in the morning, when the lux value is exceeded by 10%.
- The lux level can easily be set using the potentiometer located on the daylight control module.
- Two-wire connection between the daylight control module and the twilight switch.

Technical features

Input voltage	230 Vac/24 Vdc
Detector output	230 V (ON/OFF)
Maximum MCB rating	-10
Minimum ambient temperature	5 °C
Maximum ambient temperature	50 °C
Dimensions (HxWxD)	95 mm x 68 mm x 38 mm
Protection degree standalone	IP20

Dimensions

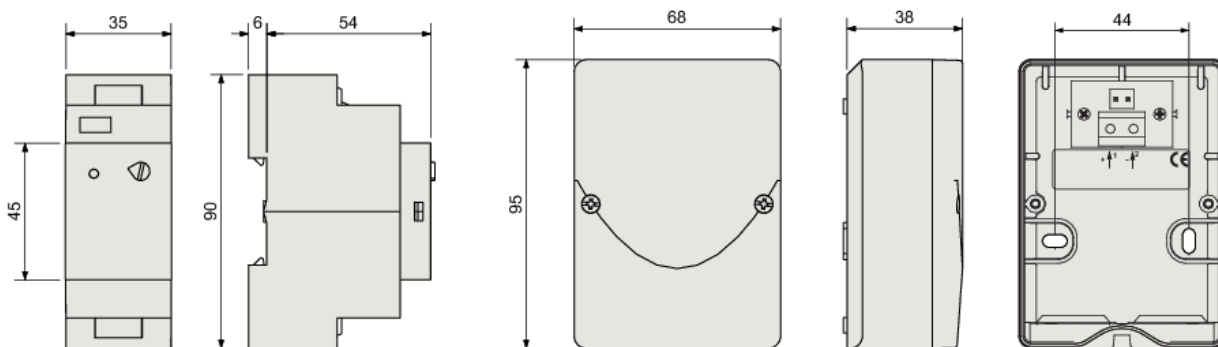

Wiring diagram

