
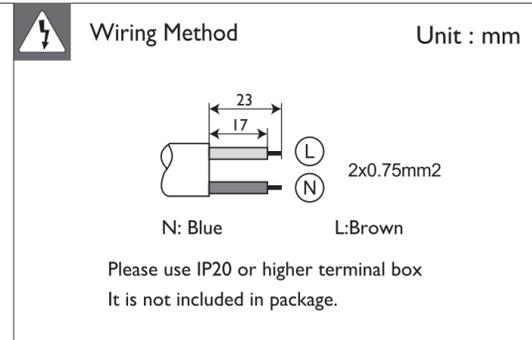
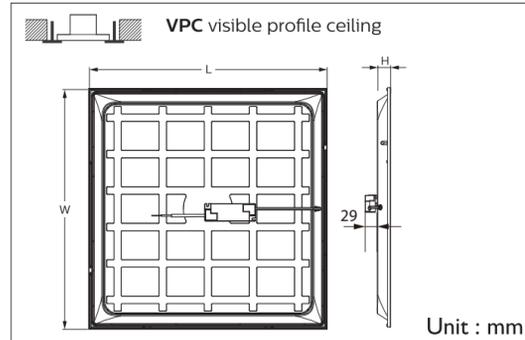


	Lumen (lm)	CCT (K)	P(W)	Energy efficiency class of light source	L xW xH (mm)	kg
MAZDA G2 RC007B 32S/840 PSU W60L60 NOC	3200	4000	32.0	E	595x595x34	1.26
MAZDA G2 RC007B 32S/840 PSU 6060 NOC CL	3200	4000	32.0	E	595x595x34	1.26
MAZDA G2 RC007B 32S/840 PSU W60L60 OC	3200	4000	32.0	E	595x595x35	1.52
MAZDA G2 RC007B 32S/840 PSU 6060 OC CL	3200	4000	32.0	E	595x595x35	1.52

Available as accessory

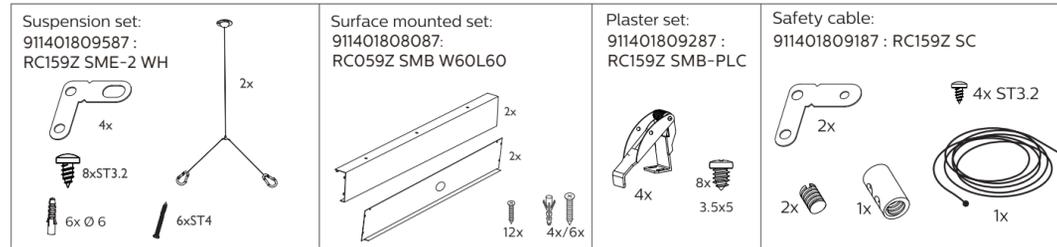

The luminaire shall, under no circumstance, be covered with thermal insulation matting or similar material.

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Luminaire must not be used or stored in corrosive environment where hazardous materials such as sulphur, chlorine, phthalates, etc. are present.

Inrush current

32W Electrical characteristics

I _{max} (A)	40
T _{ref} (µs)	4.5
MCB Luminaires Max	
B-10 A	14
B-13 A	15
B-16 A	16
C-10 A	14
C-13 A	18
C-16 A	21

A Visible Profile Ceiling mounting(VPC)

Install safety cable (Optional)

B Suspension mounting(SME-2)

Unit : mm

C Plaster Ceiling Version mounting(SME-PLC)

Install safety cable (Optional)

D Safety cable(SC)

Surface mounted
911401808087:RC059Z SMB W60L60

Unit : mm

	A	B	C	D
W60L60	602	602	573	200

W60L60: 6x
Max. Ø5mm