

## Data Sheet | Item Number: 267-123


Female connector; with direct ground contact; with snap-in mounting feet; 3-pole;  
1,00 mm<sup>2</sup>; white

<https://www.wago.com/267-123>



Color: ■ white

Similar to illustration

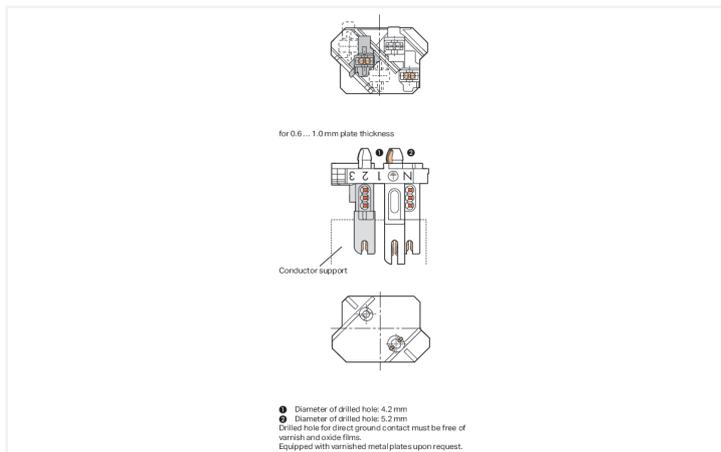

Dimensions in mm

1) Diameter of drilled hole: 4.2 mm 2) Diameter of drilled hole: 5.2 mm  
Drilled hole for direct PE contact must be free of varnish and oxide films. Equipped with varnished metal plates upon request.

Female connector, 267 Series, white

Our female connector (item number 267-123) is designed for seamless electrical installations. Strip lengths must be 8 mm when connecting conductors to this female connector. Depending on the type of conductor, this female connector is ideal for conductor cross sections ranging from 0.5 mm<sup>2</sup> to 1 mm<sup>2</sup>.

Tin is used for coating the contact surfaces.

### Electrical data

Ratings per	IEC/EN 60664-1		
	III	III	II
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated impulse withstand voltage	-	4 kV	-
Rated current	-	6 A	-

### Connection Data

Number of connection types	1
----------------------------	---

#### Connection 1

Solid conductor	0.5 ... 1 mm <sup>2</sup>
Strip length	8 mm / 0.31 inches
Pole number	3

### Physical data

Width	32 mm / 1.26 inches
Height from the surface	34 mm / 1.339 inches
Depth	32 mm / 1.26 inches

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	white
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E <sub>cu</sub> )
Contact Plating	Tin
Fire load	0.118 MJ
Weight	6.2 g

### Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C
Temperature stability	105 °C

### Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
PU (SPU)	500 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4044918499538
Customs tariff number	85366990990

### Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

### Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	NL-47718
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-100641
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 267-123	↓
--	---

Documentation

Additional Information

Technical Section	03.04.2019	pdf 2027.26 KB	↓
-------------------	------------	-------------------	---

CAD/CAE-Data

CAD data

2D/3D Models 267-123	↓
----------------------	---

CAE data

EPLAN Data Portal 267-123	↓
ZUKEN Portal 267-123	↓

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: [www.wago.com](http://www.wago.com)